
思锐E30B 双色温LED柔光灯

使用手册

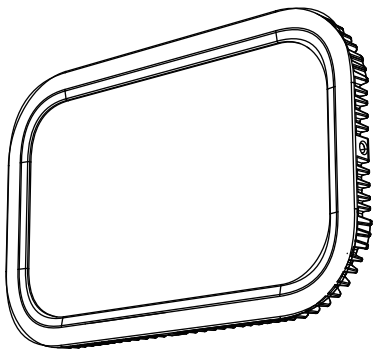

FC CE RoHS

FCC ID: 2AMDT-E30B

Made in China

V3.0 2022.07.30

前 言

双色温LED柔灯E30B是超薄设计的多用途摄的长亮摄影灯，采用侧发光的设计，使得光线输出更均匀柔和，轻便和双供电模式设计，方便室内和外排使用，适用于静物拍摄、人物拍摄、视频拍摄、直播等场景。

主 要 特 点


（1）轻巧便携，方便手持，自由布光。

（2）LED双色温模式和12种情景特效模式自由调节。

（3）侧发光布置和多重柔光设计，照度高的同时光线柔和不刺眼。

（4）支持手机APP控制，可实现多灯联控。


包 装 清 单



灯体* 1



适配器 * 1



便携袋*1




保修卡*1



多功能手柄* 1

产品介绍

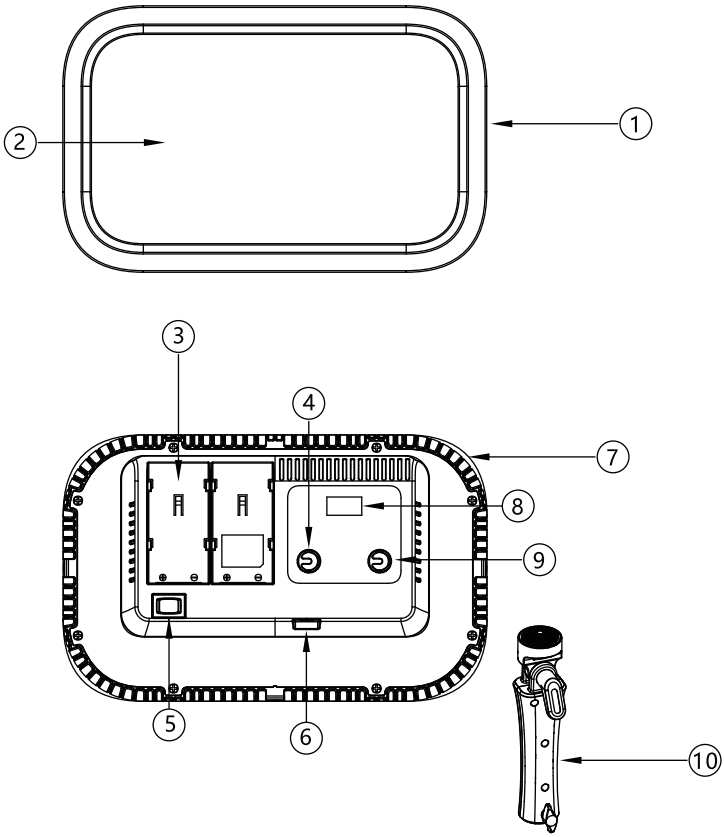

1	边框		6	DC电源插座
2	发光面		7	散热口
3	电池安装座		8	屏幕
4	SET旋钮		9	DIM旋钮
5	电源开关		10	多功能手柄

电 源 管 理

1、适配器供电

输入100-240V,50/60Hz，1.5A,输出：16.8V,3A

2、外置电池供电


安装座装2个NP-F970电池即可供电。（电池盒只供电池放电，不能充电，需两个电池同时使用）

操 作 说 明

1、 开关机


使用电池供电时，开关往”I”按下开机，往中间复位关机。

使用适配器供电时，开关往”II”按下开机，往中间复位关机。



2、 模式选择：短按SET旋钮选择CCT模式/FX特效模式


2.1 CCT模式。

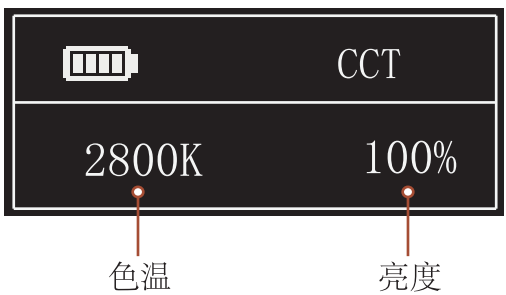

2.1.1色温调节：旋转SET旋钮调节色温，最小变量100K，调节范围2800-7000K。

2.1.2 亮度调节：旋转DIM旋钮，最小变量1%，调节范围0-100%。

2.2、情景特效模式

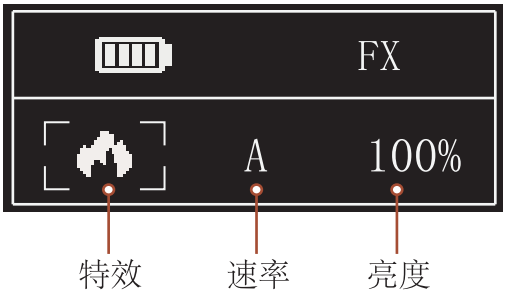

2.2.1 转动SET旋钮选择灯光特效，短按DIM选择A、B、C档位，转动DIM旋钮调整亮度。

2.2.2 亮度调节：旋转DIM旋钮，最小变量1%，调节范围0-100%。

2.2.3 情景特效模式有12类，用户可以根据需求选择：

序号	显示	场景	显示A	显示B	显示C
1		闪电	间歇	频繁	持续
2		闪光灯	闪光	发布会	狗仔队
3		故障灯	间歇	频繁	持续
4		电视荧幕	慢速	中速	快速
5		蜡烛	间歇	频繁	持续
6		火焰	柴火	篝火	火灾
7		烟花	短暂	连续	演出
8		爆炸	间歇	频繁	持续
9		色温循环	慢速	中速	快速
10		脉冲	慢速	中速	快速
11		电焊	间歇	频繁	持续
12	SOS	SOS	慢速	中速	快速

3、连接手机APP

3.1.长按SET打开蓝牙（再次长按SET关闭蓝牙）

3.2、扫描二维码下载“SIRUI Light”手机APP

3.3、手机打开蓝牙，在“SIRUI Light”APP中连接对应的灯就可通过APP控制灯。

SIRUI Light

Download on the App Store


GET IT ON Google Play


扫码下载App

具体操作请参考手机APP使用说明。

4、安装和固定

4.1 通过底部或者侧面1/4螺丝孔可以固定在带1/4螺丝柱的灯架或者桌面支架上使用。

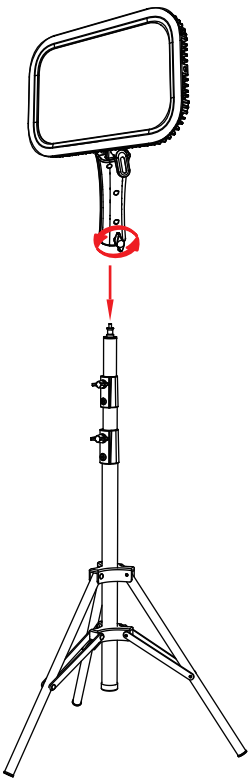

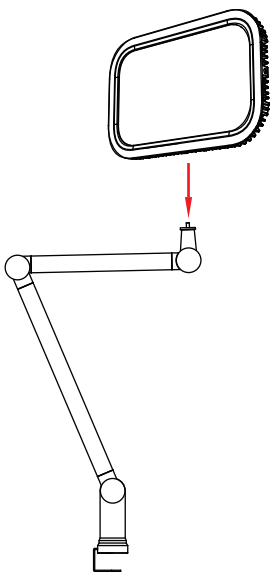

产 品 参 数

型号	E30B
产品尺寸	269*169*36mm
产品重量	约880g
LED功率	约30W
色温范围	2800K~7000K
特效模式	12类
裸灯100%光照度	1m距离 800lux
TLCI	平均98
CRI	平均96
工作环境温度	-10℃-45℃
控制方式	手机APP
蓝牙无线控制距离	15m

设计和规格如有变更，恕不另行通知。

注 意 事 项


1、请勿将灯放在高温高湿的地方。
2、请勿湿手接触产品，不可把产品浸入水中或暴露在雨中。
3、请使用配套适配器，其他规格有可能导致硬件损坏。如使用其他电源适配器造成的产品故障，不予保修。

维 护 保 养

1、灯体在工作时，如发现异常，应立即关掉电源，查明原因。
2、灯体稍有发热为正常现象。
3、维修由本厂维修部负责。
4、本产品保修一年，消耗品适配器、电源线等不在一年保修范围内。
5、经发现，擅自检修此灯的，将取消一年保修期，维修需要收取相关费用。
6、如果本品出现故障或者被水淋湿，在专业人员维修后方可继续使用。
7、设计和规格如有变更，恕不另行通知。

SIRUI E30B Bi-Color Soft LED Panel

User Manual

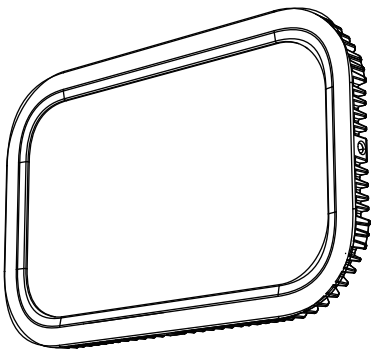


Foreword

This Bi-color LED Light E30B is a slim multi-purpose continuous light. The use of side-view SMD LEDs makes the lights given out more soft and even. Featuring a compact body and supporting both battery and adapter power supplies, this light is suitable for various shooting scenarios, e.g. live, portrait shooting, video recording, etc.

Features

1. Compact and lightweight, easy to be held in hand.
2. Freely switch between the LED bi-color mode and the light effect mode.
3. The use of side-view SMD LEDs makes sure the lights given out are bright without being too harsh.
4. Support group control and APP control.


What's in the Box



Light Body *1



Adapter *1



Pouch*1




Warranty Card*1



Handle*1

Names of Parts

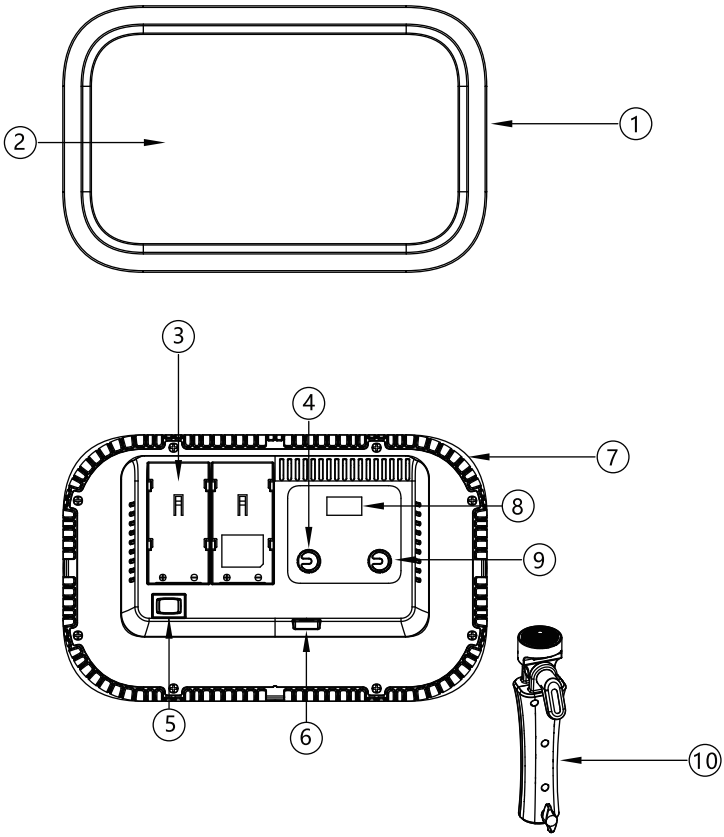

1	Frame		6	DC Power Socket
2	Light Board		7	Thermovent
3	Battery Compartment		8	Display
4	SET Dial		9	DIM Dial
5	Power Switch		10	Handle

Power Management

1. Adapter Power Supply

Input: 100-240V~50/60Hz, 1.5A, output: 16.8V 3A

2. External Battery Power Supply


Install two NP-F970 batteries into the battery compartment. (The battery case is unable to charge the batteries. When powered by the battery, make sure there are at least two batteries in the case.)

Operation

1. Power On/Off


When powered by the battery, hit "I" to turn on the light, press the button in the middle to turn off the light.

When powered by the adapter, hit "II" to turn on the light, press the button in the middle to turn off the light.



2. Mode Selection: Hit the SET dial to switch between the CCT mode and FX special effect mode.


2.1 CCT Mode

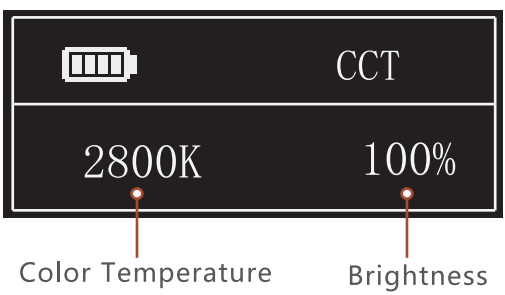

2.1.1 Color temperature adjustment: turn the SET dial to adjust the color temperature from 2800K to 7000K.

2.1.2 Brightness adjustment: turn the DIM dial to adjust the brightness from 0% to 100%.

2.2 Special Effects Mode

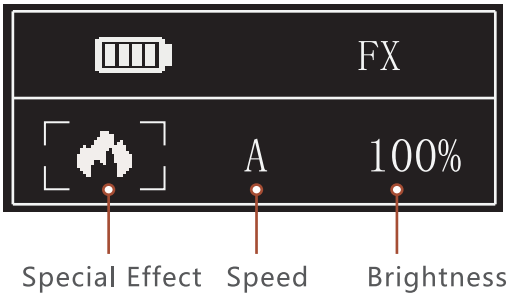

2.2.1 Turn the SET dial to select a special effect. Hit the DIM dial to adjust the speed (A, B, C). Turn the DIM dial to adjust the brightness.

2.2.2 Brightness adjustment: turn the DIM dial to adjust the brightness from 0% to 100%.

2.2.3 There are 12 situational special effects for your choice:

No.	Display	Situation	DisplayA	DisplayB	DisplayC
1		Lightning	Discontinuous	Frequent	Sustainable
2		Flash	Flash	Press Conference	Paparazzi
3		Broken Bulb	Discontinuous	Frequent	Sustainable
4		TV	Slow	Medium	Quick
5		Candle	Discontinuous	Frequent	Sustainable
6		Fire	Firewood	Campfire	Fire Hazard
7		Firework	Brief	Continuous	Show
8		Blast	Discontinuous	Frequent	Sustainable
9		RGB Cycle	Slow	Medium	Quick
10		Impulse	Slow	Medium	Quick
11		Welding	Discontinuous	Frequent	Sustainable
12	SOS	SOS	Slow	Medium	Quick

3. APP Control

3.1 Press and hold the SET dial to turn on Bluetooth. (Press and hold the SET dial again to turn off Bluetooth.)

3.2 Scan the QR code to download the "SIRUI Light" App.

3.3 Turn on Bluetooth, enter the "SIRUI Light" App. Select "E30B LED Light" from the device list.

SIRUI Light

Download on the App Store


GET IT ON Google Play


Scan the QR code to download the App.

For detailed steps, please refer to the APP instruction manual.

4. Installation

4.1 Mount the LED light on a stand via the bottom/lateral 1/4'' screw hole.

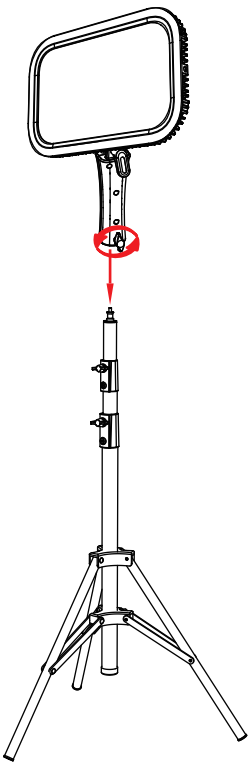

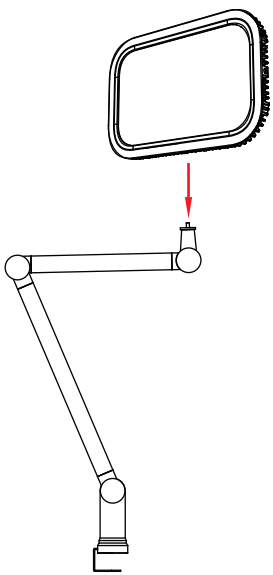

Specifications

Model	E30B
Size	269*169*36mm
Weight	about 880g
Power	about 30W
Color Temperature Range	2800K~7000K
Special Effect	12
100% Illuminance (LUX)	800 lux at 1m
TLCI	98 on average
CRI	96 on average
Working Temperature	-10℃-45℃
Control Method	APP Control
Wireless Bluetooth Control Distance	15m

* Product design and specifications are subject to change without notice.

Warning

1. Always keep this product dry. Do not put it in high-temperature or in damp conditions.
2. Do not touch the product with wet hands. As this product doesn't have waterproof capability, please take measures of waterproof in rainy or damp environment.
3. Use of unauthorized power adapter may cause damage to the product and void the warranty.

Maintenance

1. If there is something wrong with the light when it is working, please turn it off first.
2. It is normal that the light gets a bit hot when it is working.
3. Maintenance must be performed by the authorized maintenance department which can provide original accessories.
4. This product, except for consumables, supports a one-year warranty.
5. Unauthorized service will void the warranty.
6. If the product had failures or was wetted, do not use it until it is repaired by professionals.
7. Changes made to the specifications or designs may not be reflected in this manual.

SIRUI

Global Distributor Directory

Products Info

Official Website

News and Tutorials

YouTube

Services

Facebook

V1.0 2021.07

Thank you for purchasing SIRUI products! SIRUI will provide free warranty service if the product fails due to poor materials and workmanship under normal use.

The global agents are ranked in no particular order. If after-sales service is required, please contact the local agent first.

Headquarter of SIRUI Optical Co., Ltd.

After-Sale Service Hotline： 400 830 2299

Complaints Hotline：181 6563 9388

Singapore/T K Foto Technic Pte Ltd

Address: Funan 107 North Bridge Rd #03-09 Singapore 179105

Tel: +65 6904 6610 **Fax:**+65 6904 6620

http: //www.tkfoto.com.sg **E-mail:** ark@tkfoto.com.sg

India/Foto centre Trading Pvt. Ltd

Address: Foto Centre Trading Pvt.Ltd* 303, 3rd Floor, Ravi Building, 189-191, Dr. D. N. Road, Mumbai-400 001.Maharashtra,India **Tel:** 0091-9820110120

http: //www.sirui.in **E-mail:** info@sirui.in

Canada/LightPro Group Inc

Address: 3206 Wharton Way Mississauga, ON L4X 2C1

Toll Free: 1-800-361-9682 Tel: 905-940-9262

http: //www.lightprogroup.com **E-mail:** Sales@lightprogroup.com

Kazakhstan/PSP Digital

Address: г. Алматы, проспект Абая 130 (территория ЖК «Abay 130»)

Tel: 8 707 217 03 99 8 707 958 54 94

http: //pspdf.kz/contacts **E-mail:** pspkz@mail.ru

Russia /REQUIRED, LLC

Address:

Tel: 8 (499) 500-96-27

http: //kremlinstore.ru **E-mail:** order@kremlinstore.ru

Romania/West Buy S.R.L

Address: Bdul. Mircea Voda nr. 36, Sector 3, Bucharest, Romania, 030688
Telephone: +(4)021.3205652 Tel/Fax: +(4)021.3205655 Mobile: +(4)0745414956
Mobile: +(4)0752111704 Mobile: +(4)0756111947 Mobile: +(4)0752110439
http: //www.westbuy.ro **E-mail:** westbuy1@gmail.com

Slovenia/Infocona d.o.o

Address: Prevale 9, 1236 Trzin
Tel: 01/ 562 00 61 **http:** // **E-mail:** info@infocona.si

Turkey/siruiturkiye

Address: Çobançesme Mah. Sanayi Cad. Kımız Sk. No:12 Yenibosna Bahçelievler, İstanbul
Tel: 0(850)222 37 73
http: //www.siruiturkiye.com **E-mail:** oceltikci@essegrup.com

Hong Kong/HONG KONG RUIJIE TRADING COMPANY LIMITED

Address: UNIT C 15/F HUA CHIAO COMM CTR 678 NATHAN RD MONGKOK KL
Tel: 00852-9409 5241
http: // **E-mail:** paulli34@foxmail.com

South Africa/Sunshine Distribution PTY LTD

Address: 29 Keyes Avenue, Rosebank Johannesburg, 2196, South Africa
Mobile: +27 79 641 0288 **Phone:** +27 11 268 0803
http: //www.sunshineco.co.za **E-mail:** Willem@sunshineco.co.za

Israel/Argol LTD

Address: 19 Hamerkava st.Holon 5885113 Israel
Tel: +972-3-5581901-6 **Fax:** +972-3-5501148
http: //www.argol.co.il **E-mail:** eli@argol.co.il

Malaysia/Leomax (M) Sdn Bhd

Address: B-5-7, block B, Pusan komersial southgate Jln dua, off jln Chan sow Lin 55200 Kuala Lumpur, Malaysia **Tel:** (+603)9224 2001
http: //www.leomax.com.my **E-mail:** account@leomax.com.my

Panama /TODO FOTO PANAMA

Address: Avenida Justo Arosemena y Cl. 45 Este,Panamá Ciudad de Panamá
Tel: 225-4620 / 203-1288
http: //www.todofotopanama.com **E-mail:** rosa@todofotopanama.com

Nigeria/Nextgen Media Ltd

Address: 73, Allen Avenue, Ikeja, Lagos
M. +234 (0) 805 1987 394 | +234 (0) 909 1094 565
http: //www.nextgentv.tv **E-mail:** Afolasade.OK@nextgentv.tv

Ukraine/BIGggSALE.com

Address: Ровно: ул. Данила Галицького 19, 718 офис. (Главный офис)
Tel: (096)308-36-00;(063)308-36-00;(066)308-36-00
http: //BIGggSALE.com **E-mail:** shop@bigggsale.com

Luxembourg /TSE Imaging BV

Address: Argonweg 135, 1362 AD Almere,
Tel: +31 (0) 36 8450348
http: //www.tseportal.nl **E-mail:** service@tokina.eu

Belgium/TSE Imaging BV

Address: Argonweg 135, 1362 AD Almere,
Tel: +31 (0) 36 8450348
http: //www.tseportal.nl **E-mail:** service@tokina.eu

Italy /TOSCANA FOTO SERVICE S.r.l.

Address: Via Ponte all' Asse, 2/4, 50019 Sesto Fiorentino (FI)
Tel:
http: //www.sirui-italia.it **E-mail:** info@fotocomm.it

Poland/Focus Nordic

Address: Al. Jerozolimskie 180, 02-486 Warszawa
Tel: +48 697 991 248
http: //www.focusnordic.pl **E-mail:** info@focusnordic.pl

Taiwan/Tai Nein Company Ltd.

Address: 2F, No.29, Ren Ai Road, Sec 2, Taipei, Taiwan
Tel: +886-2-33433966 **Fax:**+886-2-33433969
http: //www.lf99.com **E-mail:** tainein@ms23.hinet.net

Thailand/ 456 Marketing Company Ltd

Address: 636/12 Soi Ramkhamhaeng 39 (Thepleela1), Wangthonglang, Bangkok 10310, Thailand. **Tel:** (+662)934-6565
http: //www.456mkt.com **E-mail:** online@456mkt.com

Japan/常盤写真用品株式会社

Address: 〒460-0011 名古屋市中区大須4丁目3番43号
Tel: 052-251-0351 **Fax:** 052-251-0981
http: //www.sirui-japan.com **E-mail:** takahashi@tokiwasyashin.co.jp

New Zealand/Photogear

Address: (1) 3/2 Tawa Drive, Rosedale, Auckland (2) 49 Mackelvie Street, Ponsonby, Auckland
Tel: (+64) 9 4792886
http: //www.photogear.co.nz **E-mail:** support@photogear.co.nz

Slovakia/Focus Nordic AB

Address: KUTA centrum, Zelený pruh 95/97, 140 00 Praha 4, Česká Republika
Tel: +420 604 582 550
http: //www.focusnordic.sk **E-mail:** info@focusnordic.sk

Czech Republic/Focus Nordic

Address: Zeleny pruh 95/97, 140 00 Praha 4
Tel: +46 31 336 23 00
http: //www.focusnordic.cz **E-mail:** info@focusnordic.cz

Netherlands/TSE Imaging BV

Address: Argonweg 135, 1362 AD Almere,
Tel: +31 (0) 36 8450348
http: //www.tseportal.nl **E-mail:** service@tokina.eu

Estonia/Focus Nordic

Address:
Tel: +46 31 336 23 00
http: //www.focusnordic.ee **E-mail:** info@focusnordic.ee

Vietnam (Hanoi)/SÔNG HỒNG CAMERA


Address: SÔNG HỒNG CAMERA - 44 TRÀNG THI, HOÀN KIẾM, HÀ NỘI
Tel: Hotline CH: 098.888.2533 - 024.3938.2267
http: //www.songhongcamera.com **E-mail:** banhang@songhongcamera.com

Vietnam (Ho Chi Minh)/Rawshop.vn

Address: 61 Đường Núi Thành, Phường 13, Tân Bình, Thành phố Hồ Chí Minh, Vietnam
Tel: 00842862656999
http: //rawshop.vn **E-mail:** thanhnam79@gmail.com

Saudi Arabia/Cameramix

Address: Al-Manar, Jeddah 23462 Saudi Arabia
Tel: 00966126282444
http: //cameramix.com **E-mail:** sales@cameramix.com



Republic of Korea/ Daekwang Enterprise

Address: Namdaemunno 10, Jung-gu, Seoul, South Korea (zip: 04528)
Tel: (+82) 2-752-3304
http: //www.sirui.co.kr **E-mail:** daekwangas@gmail.com

Australia/ DISCOUNT DIGITAL PTY LTD

Address: Suite1,64 Alexander St, crows Nest NSW2065, Australia
Tel: (+61)408 660 083
http: //www.pixelone.com.au **E-mail:** sales@pixelone.com.au

Indonesia/ Focus Nusantara

Address: Jln.Tanah Abang II No 77 Jakarta Pusat -10160, Indonesia
Tel: (+62)21 380 8080
http: //focusnusantara.com **E-mail:** saiful@focusnusantara.com

Republic of Lithuania /Focus Nordic

Address: Vienibas Avenue 109, LV-1058 Riga Latvia

Tel: +37 06 12 86 120

http: //www.focusnordic.lt **E-mail:** info@focusnordic.lt

Sweden/Focus Nordic AB

Address: Bergsjödalen 48, 41568 Gothenburg

Tel: +46 31 336 23 00

http: //www.focusnordic.com **E-mail:** info@focusnordic.se

Norway/Focus Nordic

Address: Ringeriksveien 164, 1339 Voyenenga

Tel: +47 67 17 37 00

http: //www.focusnordic.no **E-mail:** info@focusnordic.no

Finland/Focus Nordic

Address: Knitter Business Park, Kutojantie 6-8, FI-02630 Espoo

Tel: +35 89 42 83 41 01

http: //www.focusnordic.fi **E-mail:** info@focusnordic.fi

Denmark/Focus Nordic

Address: Erhvervsvej 30, DK-2610 Rodovre

Tel: +46 31 336 23 00

http: //www.focusnordic.dk **E-mail:** info@focusnordic.dk

Iceland/Focus Nordic

Address:

Tel: +46 31 336 23 00

http: //www.focusnordic.is **E-mail:** info@focusnordic.is

Latvia /Focus Nordic

Address: Vienibas Avenue 109, LV-1058 Riga Latvia

Tel: +46 31 336 23 00

http: //www.focusnordic.lv **E-mail:** info@focusnordic.lv

Sri Lanka/CameraLK Store

Address: CameraLK Colombo: 263, Highlevel Road Colombo 05 00500 - Western
CameraLK Majestic City: No 28, 3rd Floor Majestic City Colombo 04 00400 - Western
CameraLK Kandy: 127A 1/1 D S Senanayake Veediya Kandy 20000 - Central Province
0812233872

Tel: +(94) 117 817 870

http: //www.cameralk.com **E-mail:** ushitha@cameralk.com

Kenya/Cameras Africa

Address: Nairobi along Kenyatta Avenue, next to Phoenix House. 1 Min Walk from Sentrim 680 Hotel

Tel: 00254722764900

http: //www.camerasafrica.com **E-mail:** sales@camerasafrica.com

Garantie
Warranty
Garantía
Garanzia

For EU Market Only

SIRUI Professional Photographic Equipment

Product	Warranty length
Tripods / Monopods / Heads / Accessories	**6 years**
Humidity Control Cabinet (only Cabinet)	**6 years**
Humidity Control Cabinet (Electronics)	**3 years**
Filters / Smartphonetools / Electronic Devices	**2 years**

Produkt	Garantie Zeitraum
Stative / Köpfe / Zubehör	**6 Jahre**
Humidor Schränke (nur Schränke)	**6 Jahre**
Humidor Schränke (elektronisch)	**3 Jahre**
Filter / Smartphonezubehör / Elektronische Geräte	**2 Jahre**

Model, Modell, Modèle, Modelo

Date, Datum, Fecha, Data

Dealer, Händler, Marchand, Comerciante, Negociante

European Service Center:

SIRUI Optical GmbH • Ernst-Augustin-Str. 1a • 12489 Berlin • Germany
Phone: +49 30 991 94 94 00
Email Address : info@siruioptical.eu

Deutsch
Die SIRUI Optical GmbH, Ernst-Augustin-Str. 1a, 12489 Berlin, gewährt Käufern eine Garantie von 6 Jahren ab Kaufdatum auf die Freiheit von Herstellungs- und Materialfehlern dieses Produkts. Von dieser Garantie nicht erfasst sind Schäden durch mechanische Beeinträchtigungen, große Hitze, nicht bestimmungsgemäße Verwendung sowie Abhandenkommen. Diese Garantie gilt nur in Verbindung mit dieser Garantiekarte und einem in Europa ausgestellten Kaufbeleg. Die gesetzlichen Rechte – insbesondere die gesetzlichen Gewährleistungsrechte – bleiben hiervon unberührt. Im Garantiefall wenden Sie sich bitte an das umseitig genannte Servicecenter.

English
SIRUI Optical GmbH, Ernst-Augustin-Str. 1a, 12489 Berlin, guarantees purchasers that this product will remain free from manufacturing and workmanship defects for 6 years from the date of purchase. Damage caused by mechanical damage, excessive heat, improper use and loss are not covered by this warranty. This warranty is valid only in connection with this warranty card and a receipt issued in Europe. Statutory rights – in particular the statutory warranty rights – remain unaffected. In the event of a warranty claim please contact the service centre listed overleaf.

Français
La société SIRUI Optical GmbH, Ernst-Augustin-Str. 1a, 12489 Berlin, Allemagne, offre aux acheteurs une garantie de 6 ans, à compter de la date d'achat, contre tous défauts de fabrication ou de matériaux. Cette garantie ne couvre pas les dommages causés par des problèmes mécaniques, la chaleur excessive, l'utilisation abusive et la perte. La garantie est uniquement valable si associée à la présente carte de garantie et une preuve d'achat délivrée en Europe. Les droits légaux en particulier les droits de garantie prévus par la loi restent inchangés. En cas de recours à la garantie, veuillez vous adresser au centre de service mentionné au recto.

Italiano
La SIRUI Optical GmbH, Ernst-Augustin-Str. 1a, 12489 Berlin, offre agli acquirenti una garanzia di esenzione da difetti di fabbrica e di lavorazione di questo prodotto, della durata 6 anni dalla data di acquisto. Tale garanzia non copre alcun danno causato da guasto meccanico, calore eccessivo, uso improprio nonché perdita. La garanzia è valida solo se accompagnata dalla presente scheda di garanzia e ad una prova di acquisto rilasciata in Europa. I diritti legali - in particolare, i diritti di garanzia previsti dalla legge - rimangono inalterati. In caso di intervento in garanzia, si raccomanda di rivolgersi al centro di assistenza indicato sul retro.

Español
La sociedad SIRUI Optical GmbH, Ernst-Augustin-Str. 1a, 12489 Berlin, otorga a sus compradores una garantía de 6 años a partir de la fecha de compra por los vicios ocultos y defectos de fabricación de este producto. La garantía no cubrirá los daños ocasionados por desgastes mecánicos, altas temperaturas, un uso no conforme con lo prescrito o por pérdida o extravío, y sólo será válida presentando esta carta de garantía y el comprobante de compra expedido en Europa. Lo anterior no afectará a los derechos legales y, en particular, a los derechos de garantía legales. En el caso contemplado en la garantía, le rogamos se ponga en contacto con el Centro de atención al cliente, cuya dirección consta en el dorso de esta carta de garantía.

Portugués
A SIRUI Optical GmbH, Ernst-Augustin-Str. 1a, 12489 Berlin, garante aos seus clientes uma garantia de 6 anos a partir da data de aquisição relativa à liberdade de defeitos de produção e fabrico do produto. Esta garantia não cobre danos causados por efeitos adversos decorrentes de avaria mecânica, calor excessivo, utilização indevida, ou perda. Esta garantia é apenas válida mediante apresentação deste cartão de garantia e um recibo emitido na Europa, sem prejuízo dos direitos legais (em particular, os direitos legais de garantia). Em caso de reclamação, contate o centro de serviço referido no verso.

SIRUI Warranty

Professional Photographic Equipment

For US Market Only

SIRUI USA, LLC

For technical support,service or repairs please,contact:

29 Commerce Court Verona, NJ 07044

info@sirui.com Phone: 866-373-0829

Thank you for your purchase of Sirui professional products! Sirui warrants that your purchase is free from defects in materials and workmanship, under normal use during the Limited Warranty period. The warranty period starts on the original date of purchase on your sales receipt. If service is required, please include a copy of the sales receipt and this warranty card, with an explanation of the problem. Please store your sales receipt and warranty card in a safe location.

Product	Warranty period
Tripods and Heads	6 years
Optical and Smart Products	1 year (Battery: 6 months)
Humidity Control Cabinets	6 year (Electronic components: 3 years)

Model purchased :

Date :

Store :

Serial number :

Sirui USA Limited Warranty

This warranty is limited to the repair, adjustment and/or replacement, at Sirui or its authorized distributor's option, of defective parts, free of charge (except the cost of transportation to the distributor/service center). Responsibility is limited to actual cost of item.

Register online at www.sirui.com. Call or email with questions or problems, before sending product in for repair. For warranty service on product purchased in the USA, all shipping and insurance charges must be prepaid. Include a copy of the sales receipt, this warranty card and an explanation of the problem. The product or defective part(s) may be sent through a local authorized SIRUI USA dealer or directly to the SIRUI USA distributor/service center indicated on this warranty card.

Sirui will not be responsible for expenses or inconveniences, or consequential damages to equipment, or by breach of any expressed or implied warranty.

Out-of-warranty repairs - An estimate (including shipping costs) will be provided by the SIRUI USA distributor/service center indicated on this warranty card and repairs will begin once the estimate is approved and payment is received. A return shipping fee will be charged for refused estimates.

Limitations

Warranty is non-transferable. This warranty covers all defects encountered in normal use of the equipment and does not apply in the following cases:

1) If the equipment has been serviced by other than an authorized Sirui distributor or service center.
2) Damage to the equipment due to modification, overloading, mishandling, abuse, accident, sand, corrosives, water damage or not following operating instructions.
3) No valid proof of purchase is provided.
4) Damage caused by acts of nature (including, but, not limited to fires, floods or earthquakes).

This warranty is only valid when product is purchased from an authorized SIRUI USA dealer.

Please visit SIRUI's USA official website or consult the local dealer for the Return and Exchange Policy.

SIRUI Light APP 说明



V 4.0 2022.04.26

目 录

一、软件说明

1.1 综述 01

1.2 APP下载和安装 01

1.3 启动界面 02

1.4 灯光设备界面 02

1.5 灯光控制主界面 05

二、软件操作

2.1 色温调节功能 06

2.2 色调调节功能 07

2.3 自定义功能 08

2.4 特效功能 09

2.5 拾色器功能 10

三、群组控制

四、设备固件升级


4.1 蓝牙固件升级 12

4.2 控固件升级 13

1.3 启动界面

在桌面上点击SIRUI Light APP的图标就会出现以下的启动界面，启动界面主要展示产品内容，启动界面预览时间大概是2秒，2秒后会自动进入设备界面。

如下图所示：

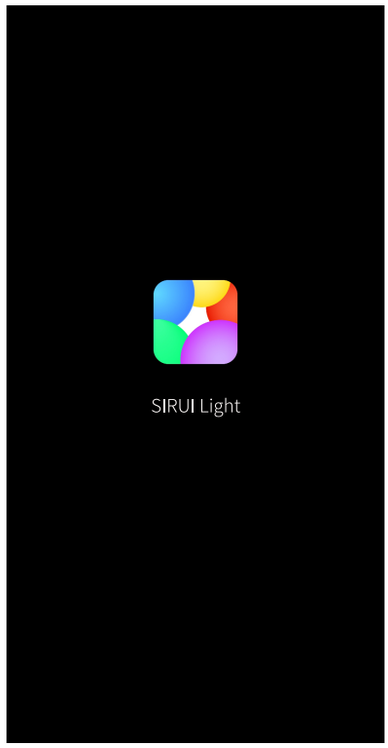


1.4 灯光设备界面

进入灯光设备界面，会自动扫描现场已经打开的灯光设备，点击设备后会自动蓝牙连接和组网，如下图所示：



蓝牙组网完成后，进入设备界面，设备界面显示灯光产品对应的设备列表，可以查看灯光电池电量，开关灯控制，重命名灯光，灯光固件升级，如下图所示：

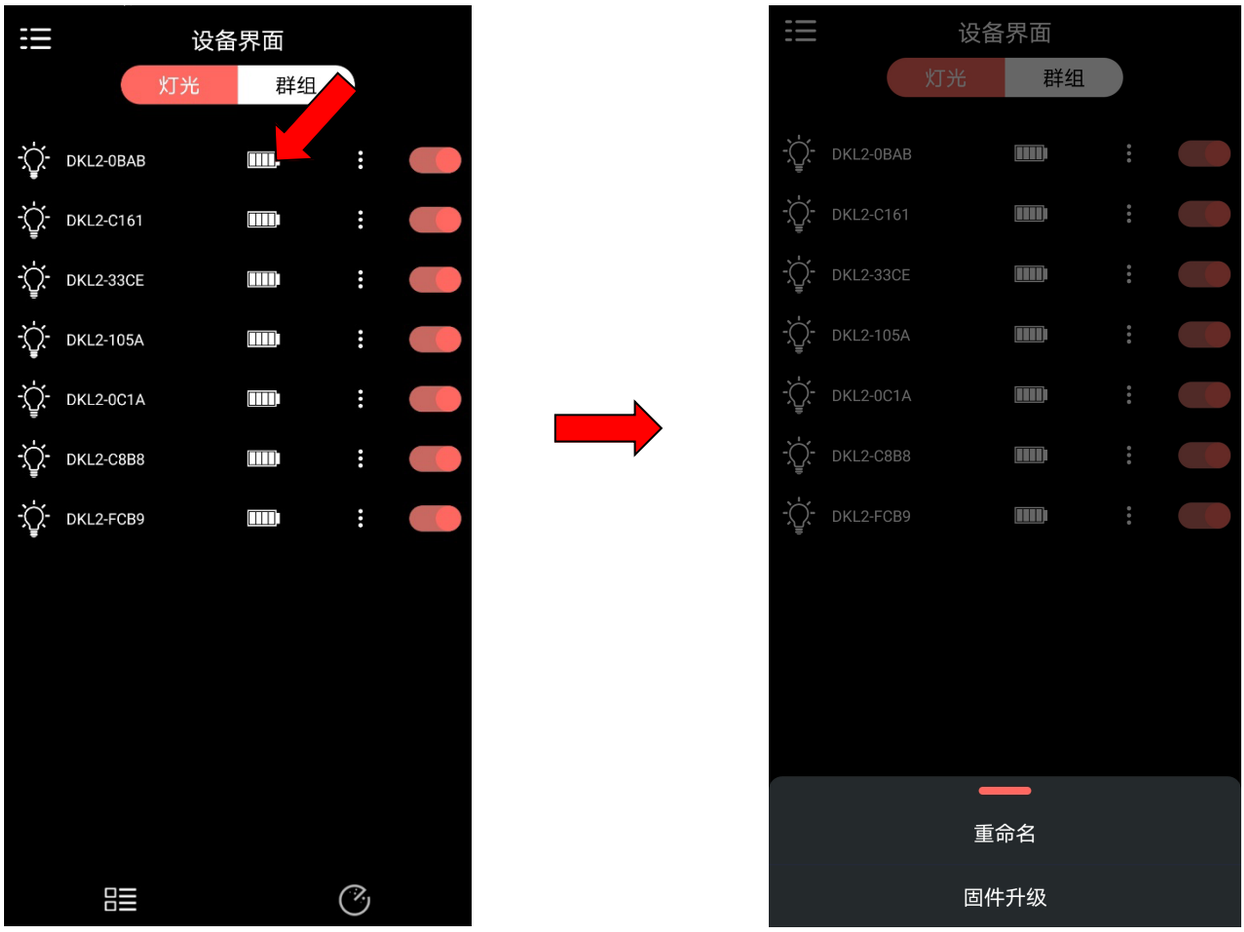

在灯光设备界面，点击左上角按钮，SIRUI Light APP会进入信息界面，可以选择中英文语言，显示《隐私条款》和《用户协议》，点击后可以查看《隐私条款》和《用户协议》。显示当前APP版本号，以及点击可以检查APP新版本升级。

如下图所示：




在灯光设备界面，点击右下角的“发现”按钮，可以查看产品的说明书，方便用户查阅说明书和使用教程。如下图所示：



1.5 灯光控制主界面

在灯光设备界面中，点击一个设备名称，此时会进入设备控制界面，如下图所示：

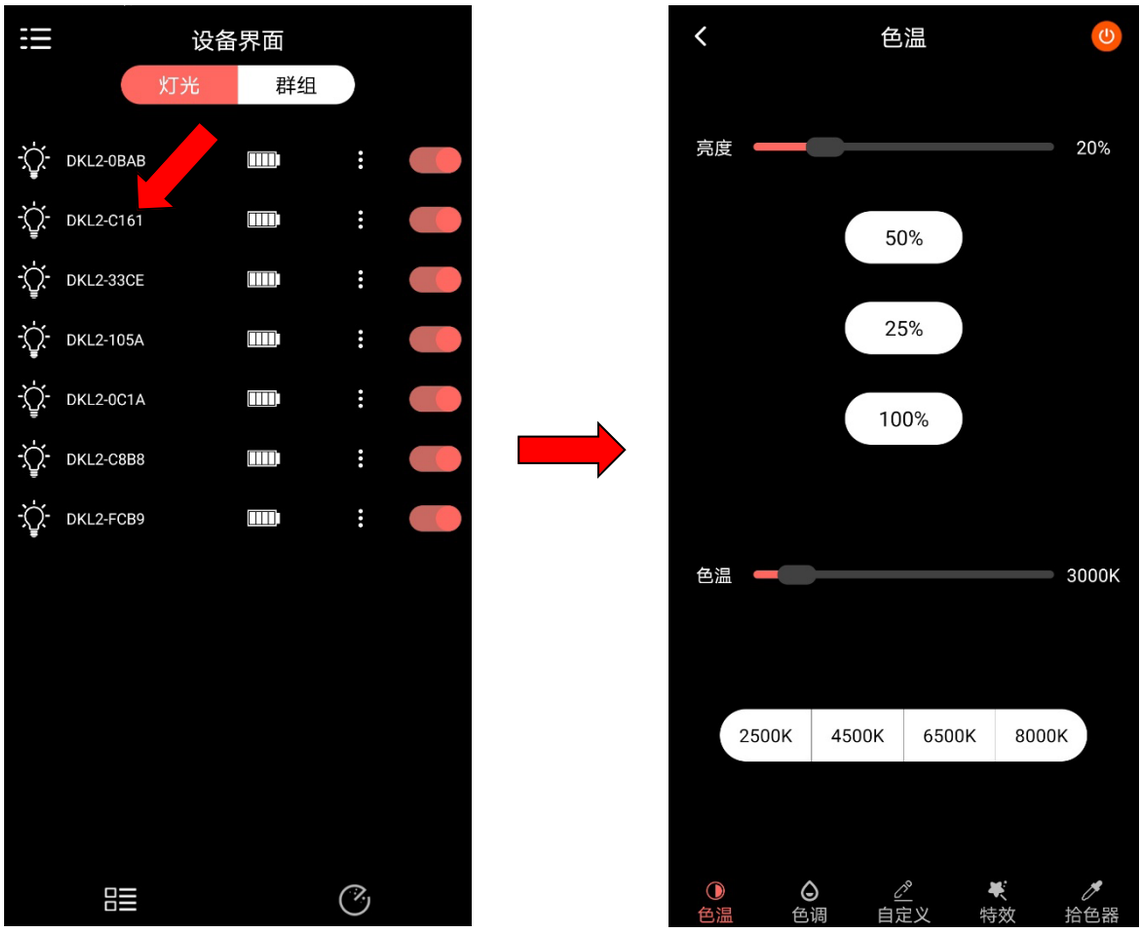

进入设备控制界面后，该软件功能强大，界面包含多个核心功能，包含色温调节、色调调节、自定义、特效、拾色器等功能。

注意：

1、具有双色温和RGB功能的补光灯的控制界面有：色温调节、色调调节、自定义、特效、拾色器。

2、具有双色温功能的补光灯的控制界面有：色温调节、特效。


3、具有单色温功能的补光灯的控制界面有：常规、特效。

二、软件操作

2.1 色温调节功能

用户点击底部菜单栏的色温按钮，进入色温控制页面，可点击开关按钮，可以设置冷光值、暖光值（可调范围为2500K-8000K），可以快捷选择2500K、4500K、6500K、8000K灯光值，可以设置灯光亮度0-100%，可以快捷设置亮度为25%、50%、100%。

操作如图：

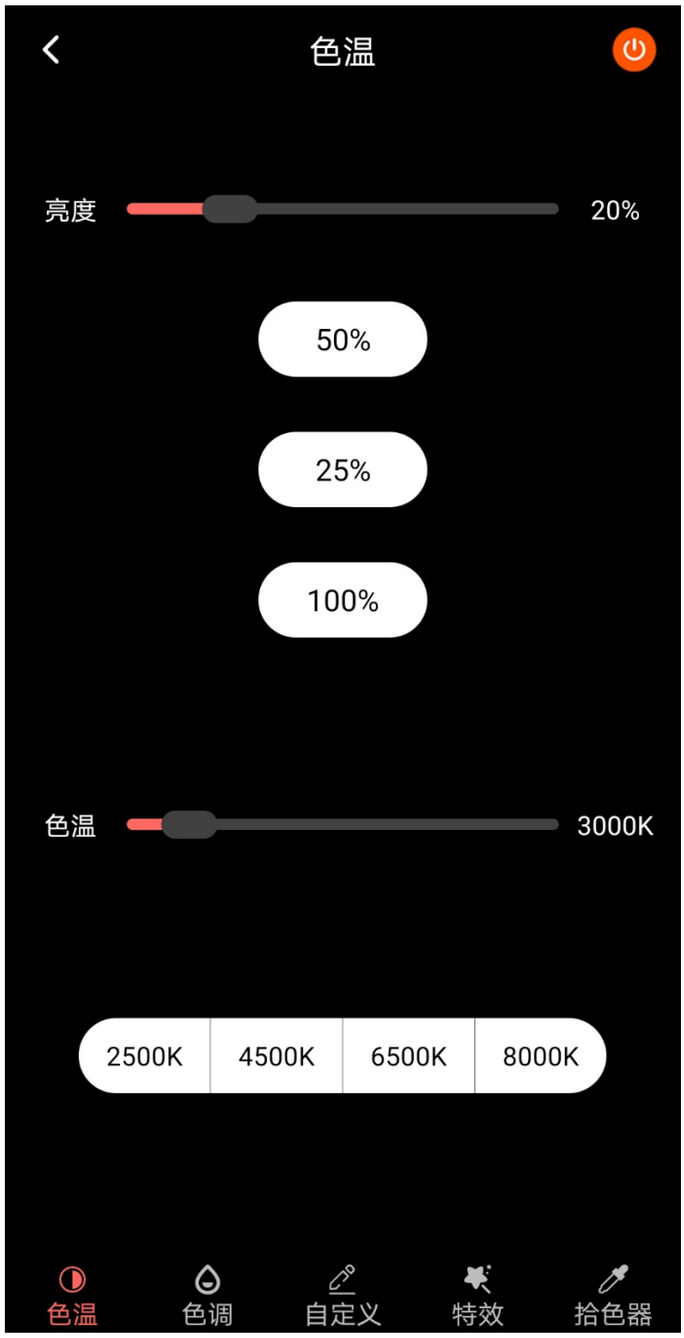



2.2 色调调节功能

用户点击底部菜单栏的色调按钮，进入色调控制页面，可以选择H S I控制或者RGB控制：

1、H S I控制：可以快捷选择常用颜色设置灯光颜色，可以通过色环快速设置颜色值，可以设置亮度、色相、饱和度，可以开关灯控制，右上角可以保存设定的色值。

2、RGB控制：可以快捷选择常用颜色设置灯光颜色，可以通过色环快速设置颜色值，可以设置亮度、红色值、绿色值、蓝色值，可以开关灯控制，右上角可以保存设定的色值。

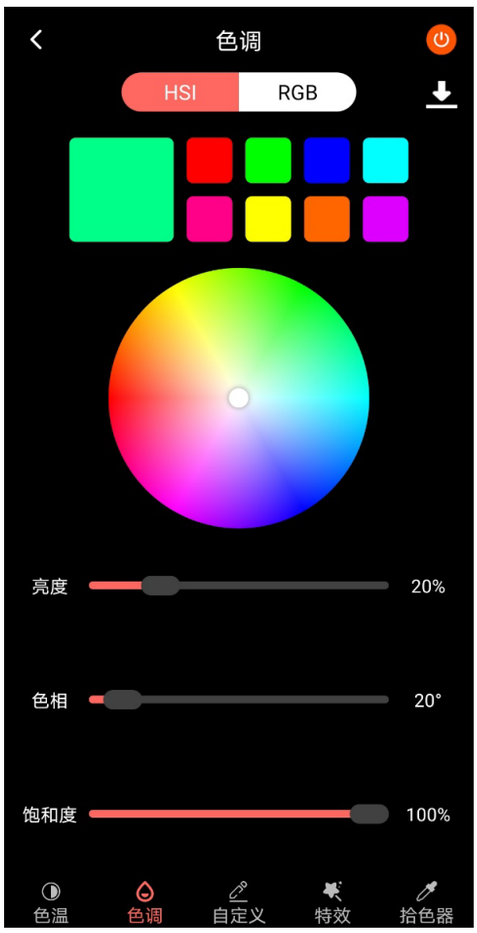


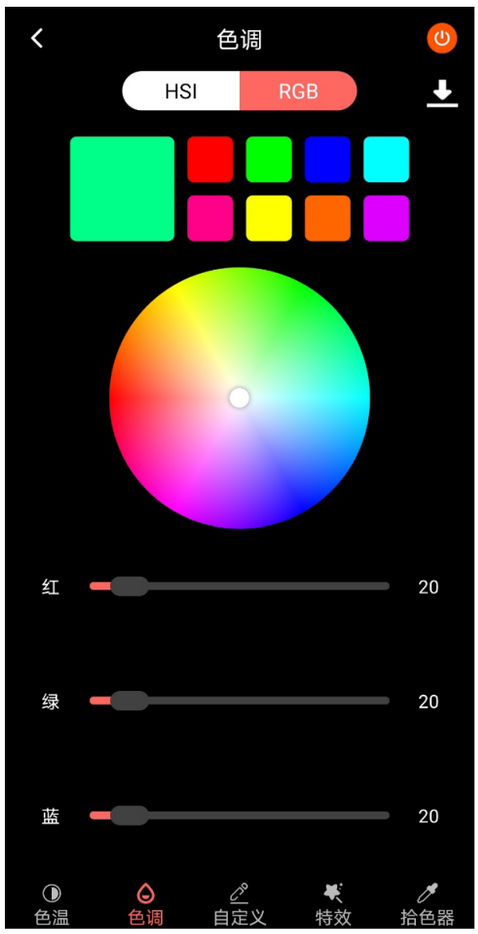


2.3 自定义功能

用户点击底部菜单栏的自定义按钮，进入自定义控制页面，可点击开关按钮控制灯光开关，可以设置色相补偿，可以设置饱和度补偿，可以设置灯光亮度0-100%，可以选择自定义色值（色温和色调保存的色值）。

操作如图：

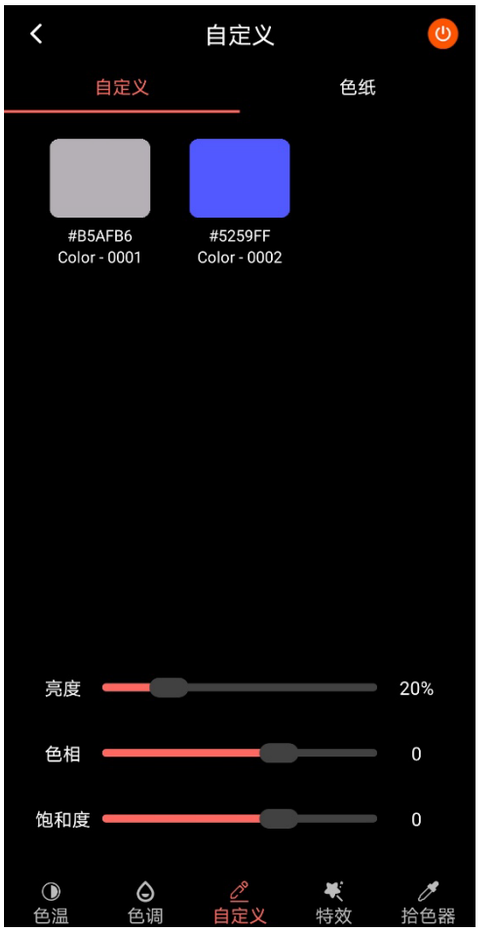

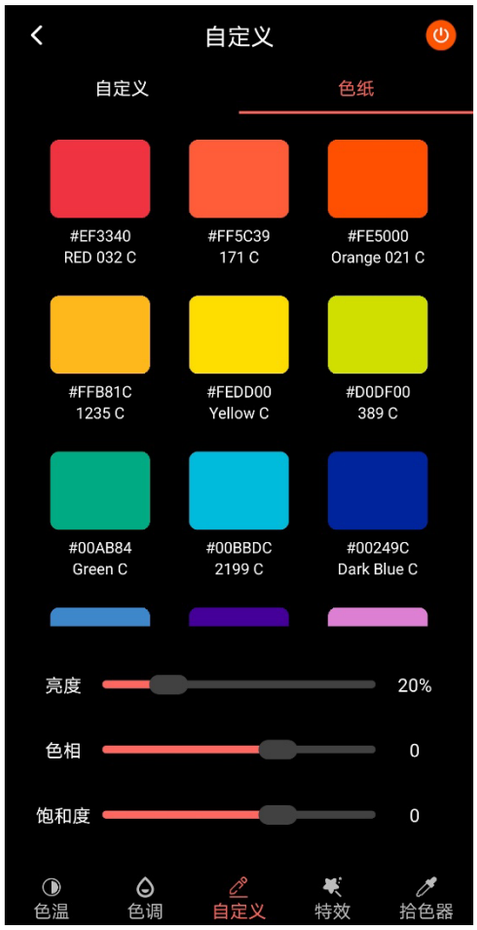

2.4 特效功能

用户点击底部菜单栏的特效按钮，进入特效控制页面，可点击开关按钮控制灯光开关，可以设置特效速度，可以设置灯光亮度0-100%，特效效果有：RGB循环、闪光灯、迪斯科、闪电、故障灯、电视荧幕、蜡烛、火焰、烟花、警车、消防车、救护车、音乐、SOS。

操作如图：




注意事项：不同型号灯光产品，对应产品的APP特效功能使用方法相似，具体参考实际产品功能。

2.5 拾色器功能

用户点击底部菜单栏的拾色器按钮，进入拾色器控制页面，可点击开关按钮控制灯光开关，按取色按钮可以打开手机摄像头获取指定的颜色值，饱和度、色值和颜色显示在画面中，可以设置色相补偿，可以设置饱和度补偿，可以设置灯光亮度0-100%；拾取的颜色值可以保存到自定义列表，

操作如图：

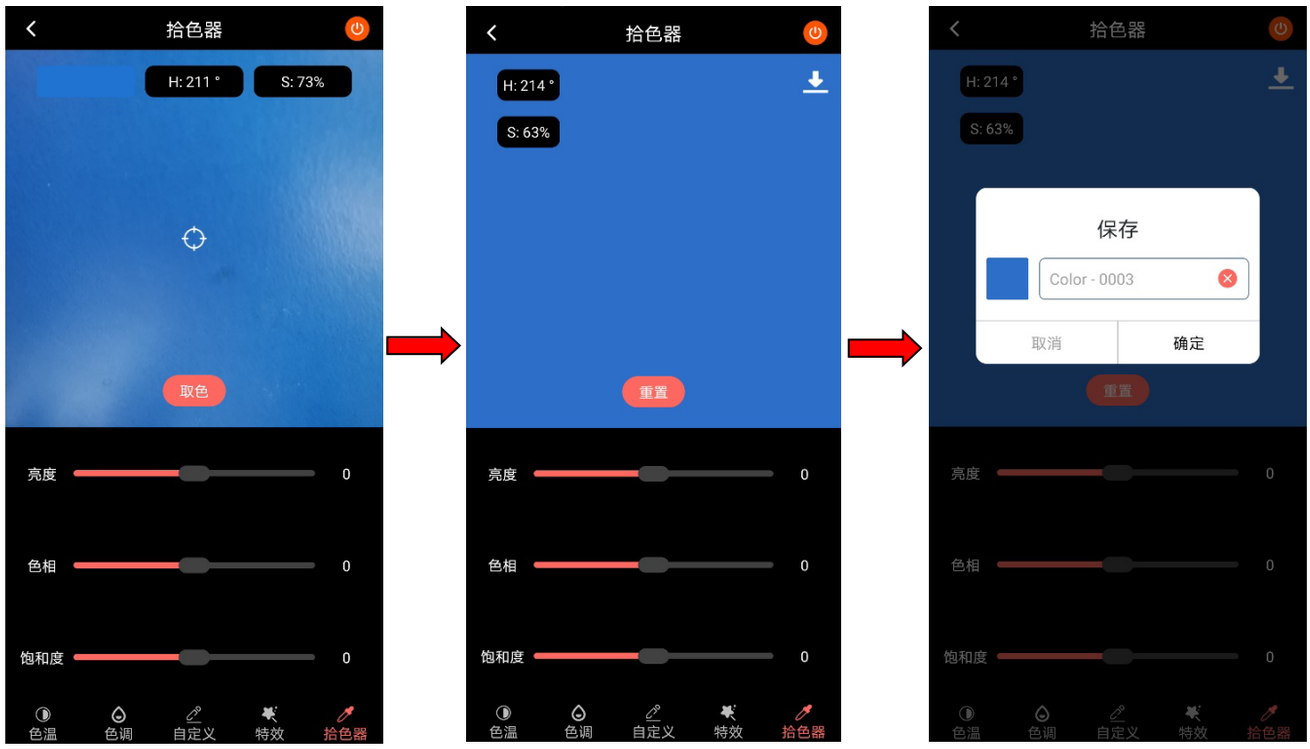

三、群组控制

在灯光设备界面中，点击“灯光”按钮右边的“群组”按钮，此时会进入群组控制界面，如下图所示：

1、点击右上角的“+”，可以添加群组，可以选择灯光设备进行分组控制。

2、添加完后点确认。

3、返回到群组界面。

4、点击群组名称可以进入到灯光控制界面，界面包含多个核心功能，包含色温调节、色调调节、自定义、特效、拾色器功能。



5、群组分组控制规则

A、功能最多的就是：双色温+RGB

B、其次是：双色温


C、最后是：单色温

A > B > C多灯组合时取交集


比如，同时存在A、B、C，点击群组 或者 全部设备时，使用进入最少功能 C控制界面。

四、设备固件升级

在灯光设备界面，点击一台灯光的菜单按钮，弹出固件升级菜单，如图所示：

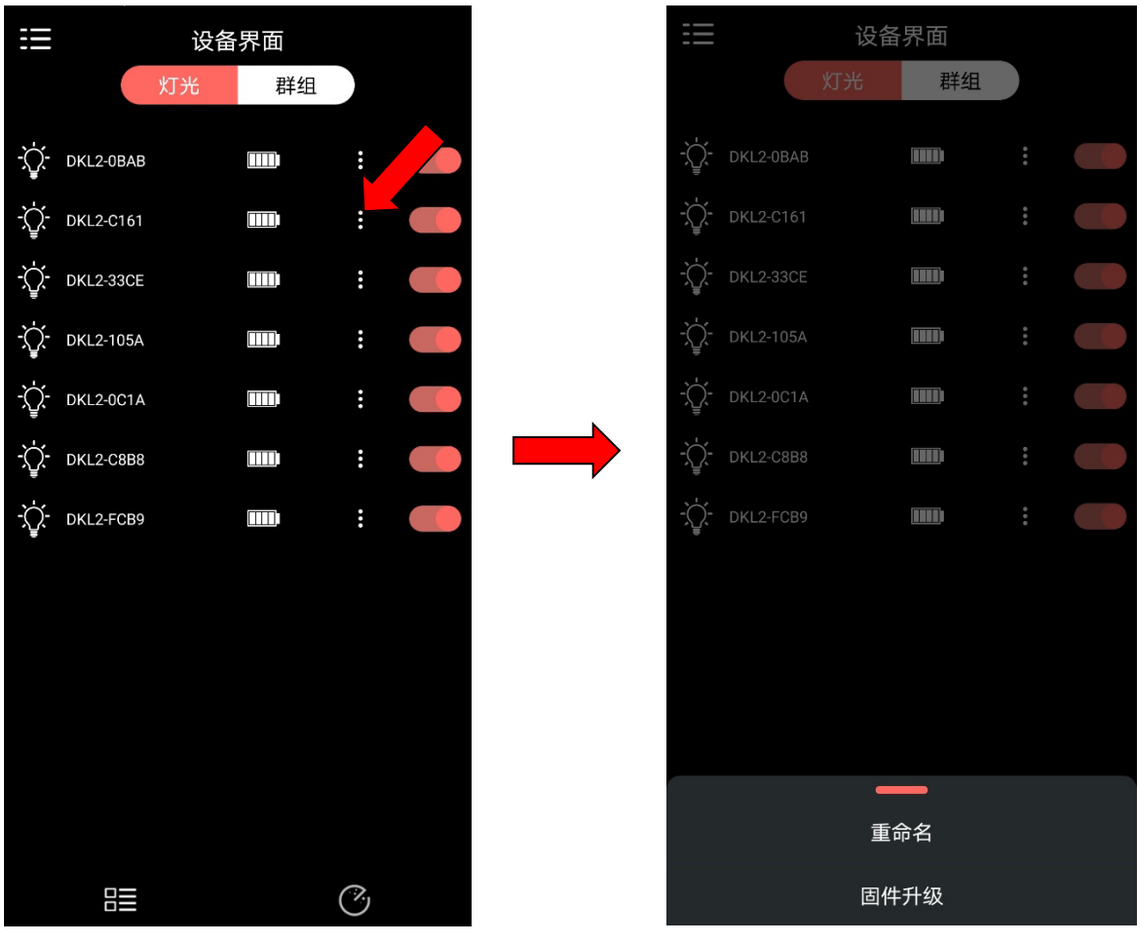

点击固件升级，进入固件升级页面，固件升级有蓝牙固件升级和主控固件升级，点击检查更新可以查看是否有固件更新：

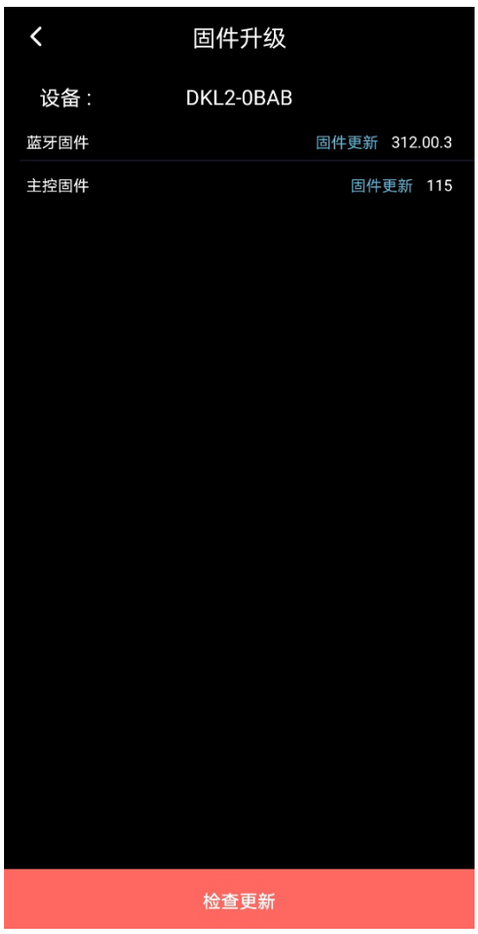

升级注意事项：

1、保持设备电量三格以上。

2、每次升级只支持一台设备，多台设备需要逐台升级。

3、建议拉开第二节灯管升级，这样蓝牙信号更好。

一、软件说明

1.1 综述

SIRUI Light APP适用SIRUI补光灯系列产品，用于控制色温、亮度、色相、饱和度、特效、色值、拾色、控制组网灯阵和分组管理，可以自由调节丰富色彩，轻松满足各类拍摄需求。智能控光，打造各类创意拍摄场景，实现更多可能。

1.2 APP下载和安装

请扫描二维码或在软件商店搜索“SIRUI Light”下载安装 (iOS 9.0 以上 Android 5.0以上)。







扫码下载App



说明：

APP安装完成后，使用前需要打开蓝牙，GPS位置（蓝牙指定需要打开），需要用户授权APP存储权限、相机权限。



1.3 注意事项

以下界面功能以L2补光灯控制功能作为例子，L2是集成了双色温和RGB控制功能的补光灯，本公司还有双色温补光灯、单色温补光灯，对应产品的APP功能使用方法相似，具体参考实际产品功能。


4.1 蓝牙固件升级

1、点击蓝牙固件右边的“固件更新”。

2、弹出升级提示，再点立即下载，设备就会进入升级状态（此时补光灯会红色闪烁，表示正在升级状态）。

3、升级进度条会充0%至100%增加，升级完成后提示“升级成功，请重启设备”。

4、重启设备重新连接APP使用即可。

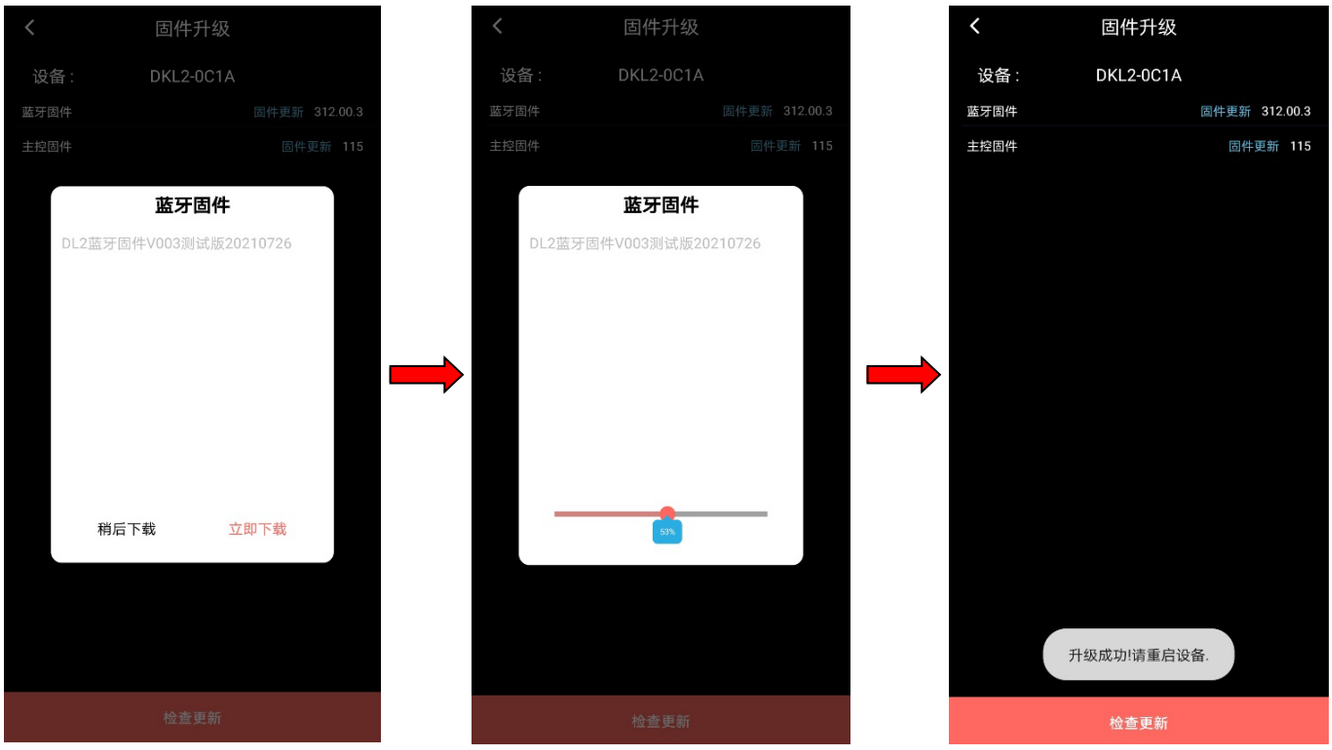


4.2主控固件升级

1、点击主控固件右边的“固件更新”。

2、弹出升级提示，再点立即下载，设备就会进入升级状态（此时补光灯会红色闪烁，表示正在升级状态）。

3、升级进度条会充0%至100%增加，升级完成后提示“升级成功，请重启设备”。

4、重启设备重新连接APP使用即可。

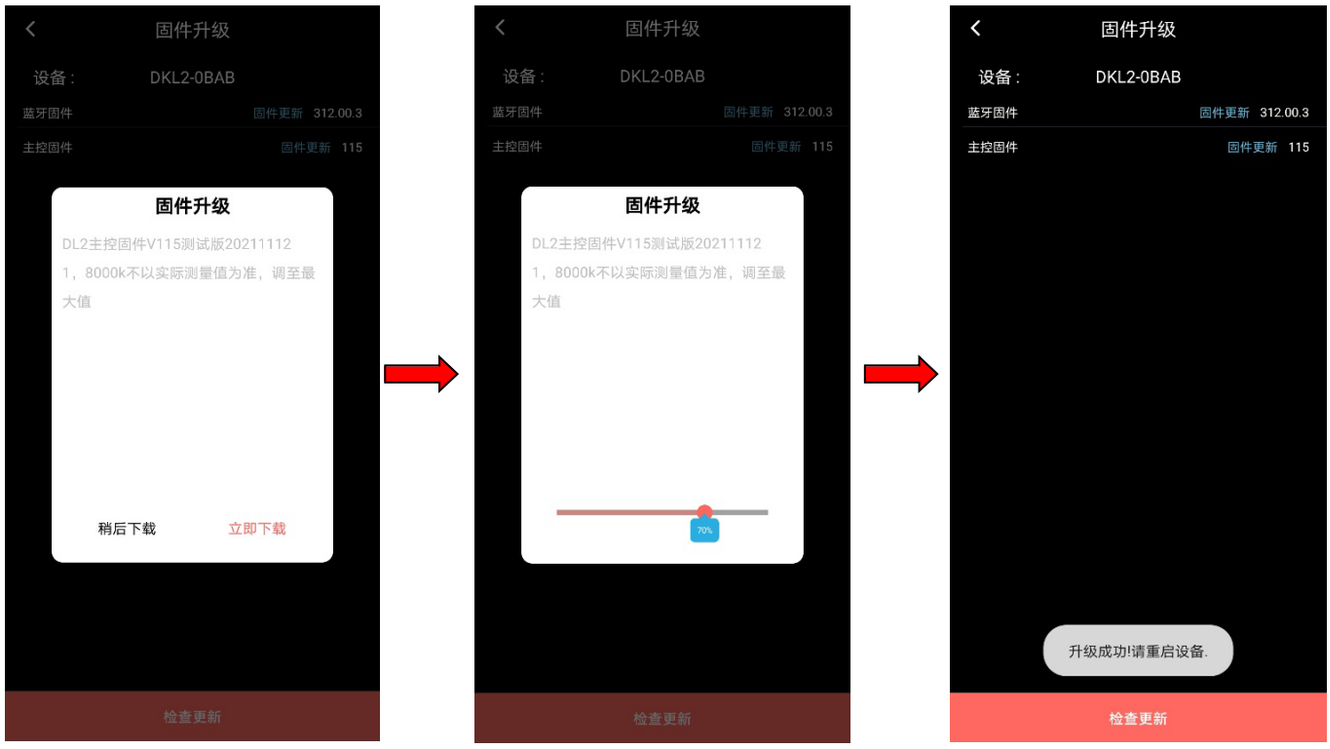

SIRUI Light APP User Guide



V 4.0 2022.04.26

Contents

Ⅰ、APP Description

1.1 Overview 01

1.2 App Download and Installation 01

1.3 Splash Screen 02

1.4 Studio 02

1.5 Light Control Interface 05

Ⅱ、Main Features

2.1 CCT Mode 06

2.2 Colorful Mode 07

2.3 Custom Mode 08

2.4 Effects Mode 09

2.5 Color Picker 10

Ⅲ、Group Control


Ⅳ、Firmware Upgrade

4.1 Bluetooth Firmware Upgrade 12

4.2 Main Firmware Upgrade 13


1.3 Splash Screen

The splash screen below will appear when clicking on the icon of SIRUI Light APP. The splash screen will display the product and the preview will last for about 2 seconds.

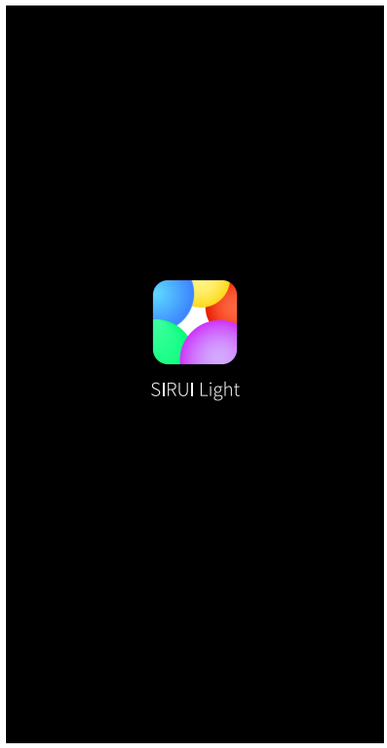


1.4 Studio


After entering the studio, the App will automatically search for lights that are turned on. Select the lights you want and start combination.

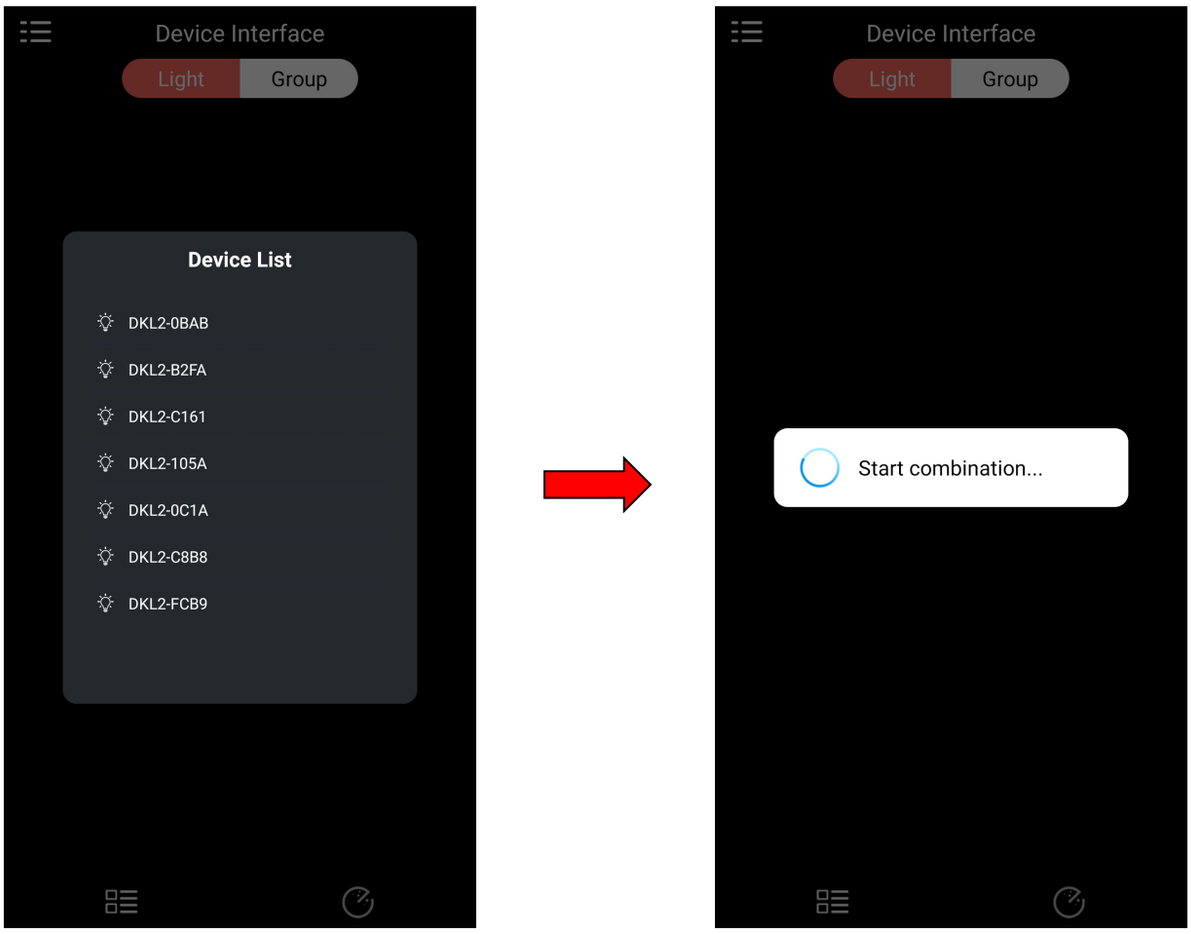


Once the combination is finished, lights will be listed in the studio. You can rename/turn on or off the lights, check their battery level or upgrade their firmware all in this app.

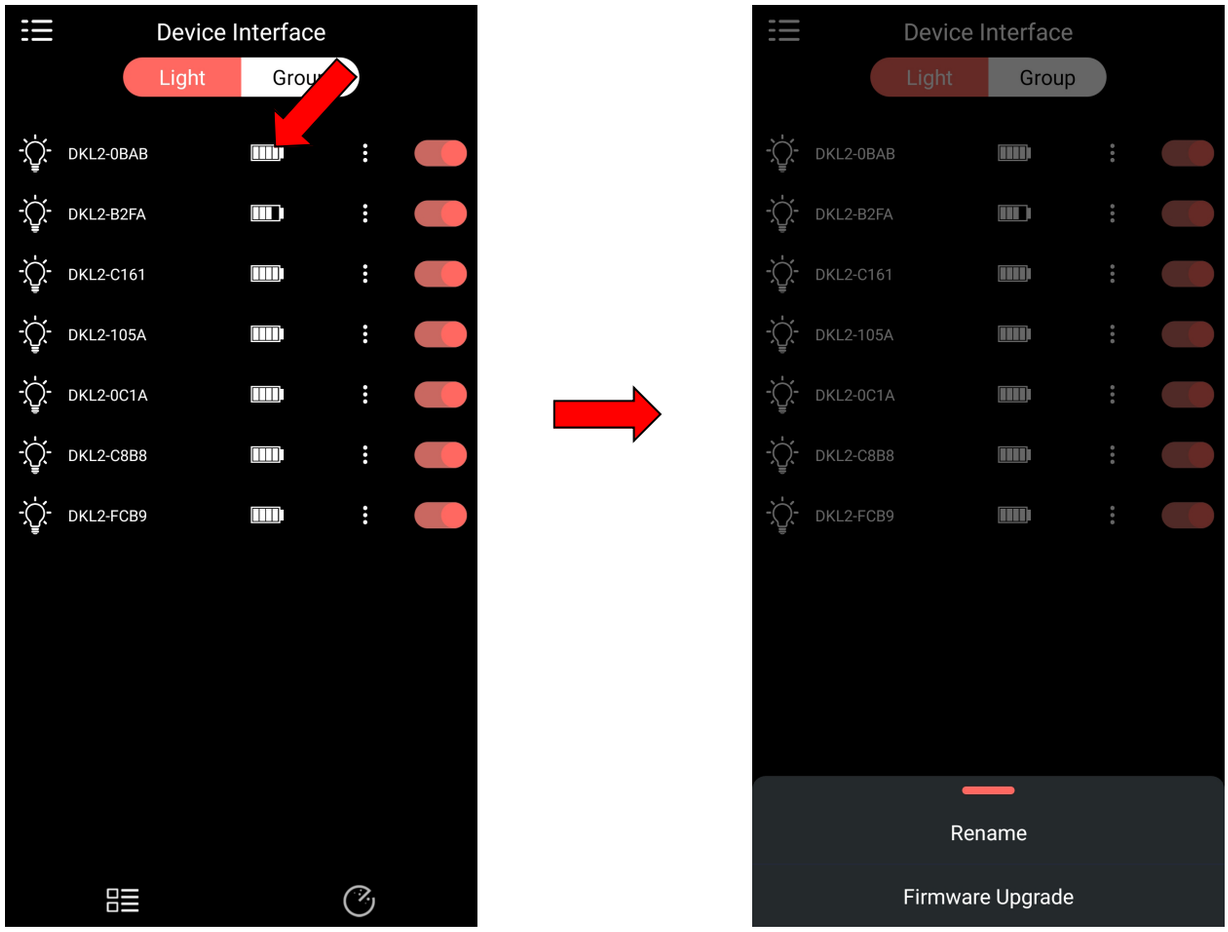

Click the button on the upper left to enter the information interface, where you can select a language, view the Privacy Policy, User Agreement, APP version number and check whether there is a new version for the APP.

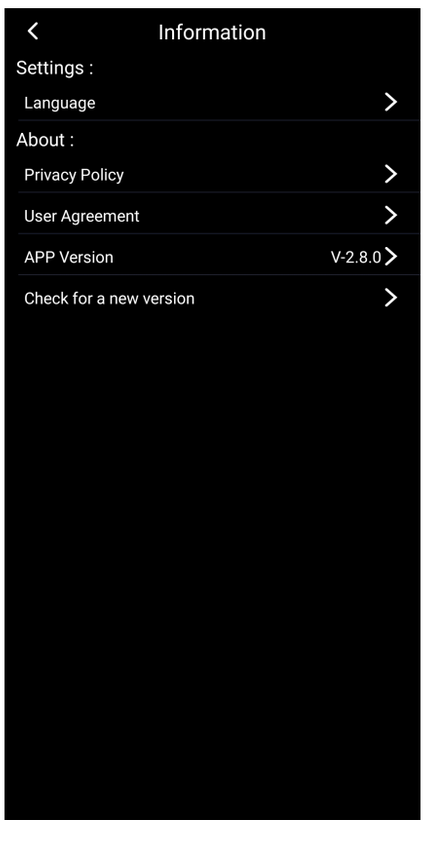


Click the "more" button on the lower right to view the product manual.

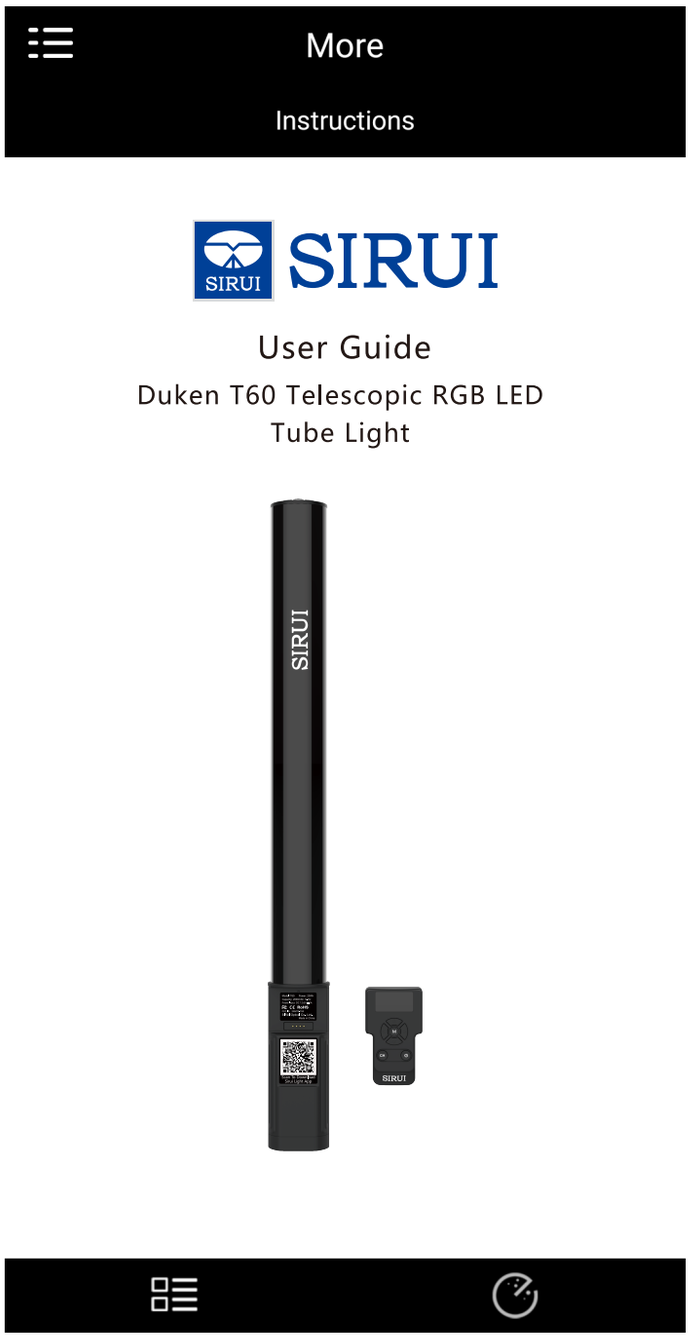

1.5 Light Control Interface

Click a light to enter its control interface.

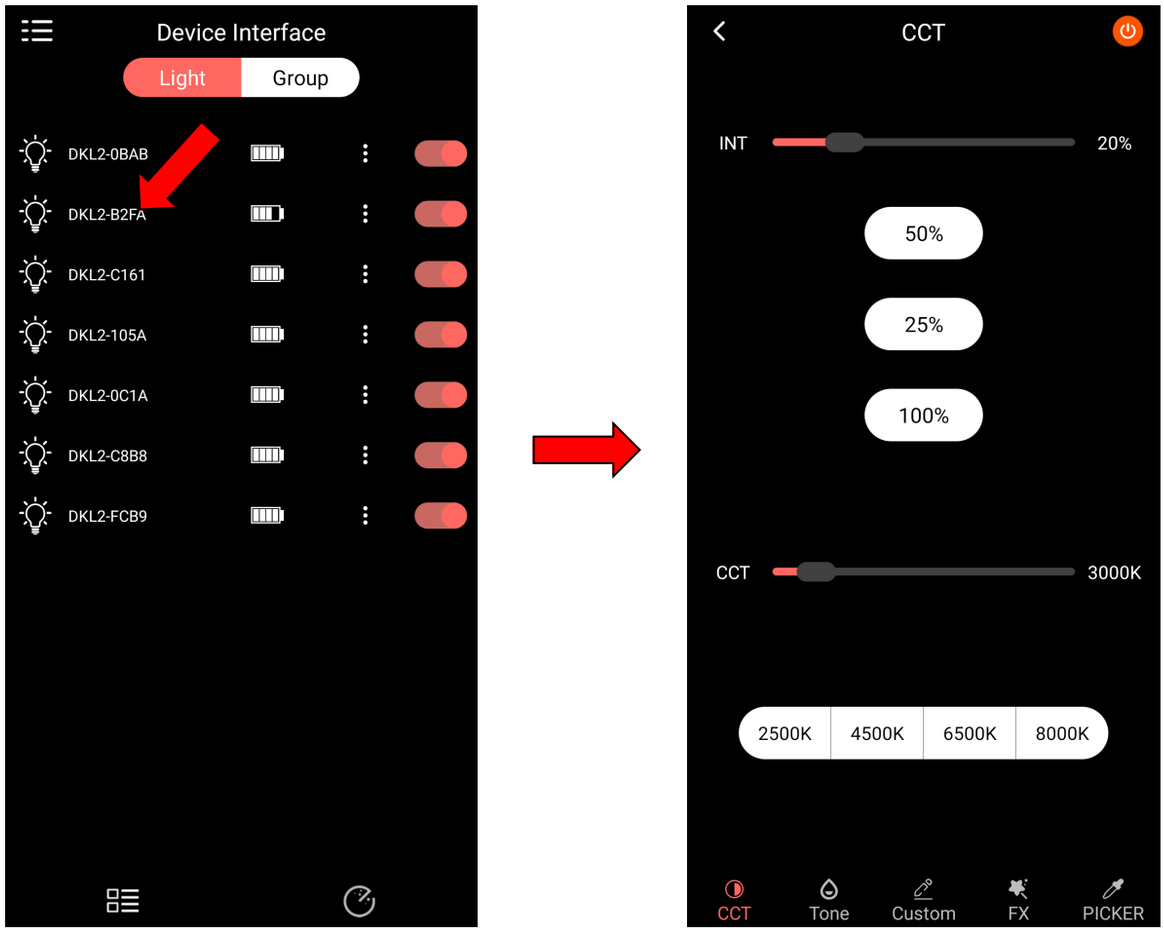

You can adjust the color temperature/hue/brightness, select an effect, pick a color, etc. in the light control interface.


Notice

1. Bi-color and RGB LED light has the following functions on the control interface: CCT, Tone, Custom, FX, Color Picker.
2. Bi-color LED light has two functions on the control interface: CCT, FX.
3. Single-color LED light has two functions on the control interface: Common, FX.

II、Main Features

2.1 CCT Mode

Tap the CCT icon at the bottom to enter the control interface. Tap the switch button to turn on/off the light. You can use the sliders to adjust the brightness from 0% to 100% and the color temperature from 2500K to 8000K as required.

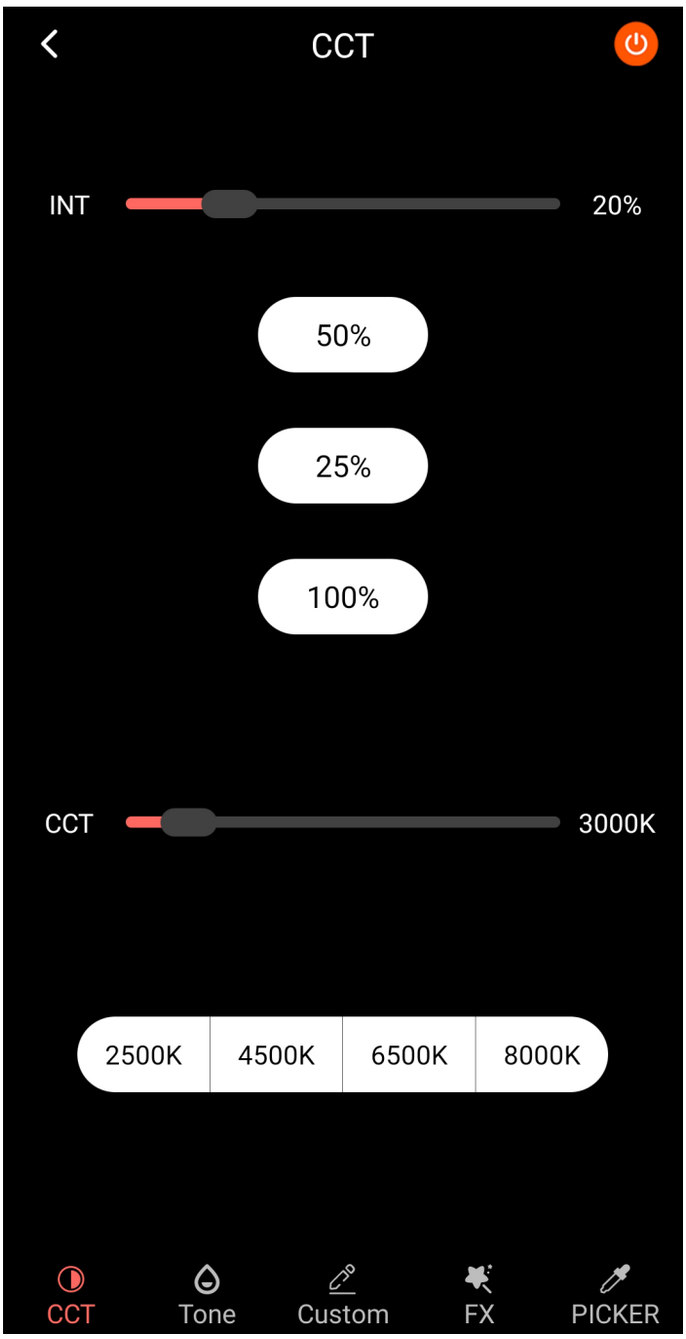



2.2 Colorful Mode

Tap the tone icon at the bottom to enter the control interface. There are two tabs across the top, HSI and RGB.

1. HSI Control: Commonly used colors are listed for your choice. Drag your finger around the color wheel to choose a color you want. Brightness, hue and saturation can all be adjusted with the sliders. Tap the switch button to turn on/off the light. Tap the save button to save your settings.


2. RGB Control: Commonly used colors are listed for your choice. Drag your finger around the color wheel to choose a color you want. Red, green and blue values can all be adjusted with the sliders. Tap the switch button to turn on/off the light. Tap the save button to save your settings.

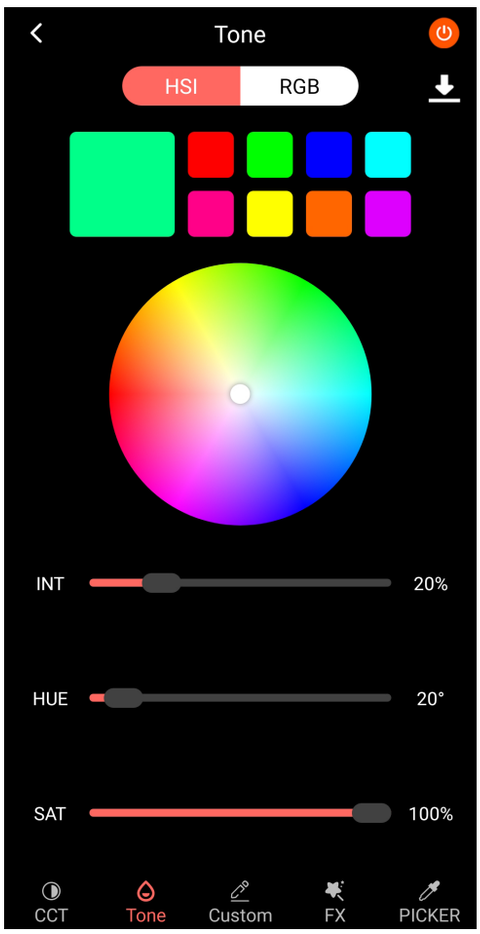


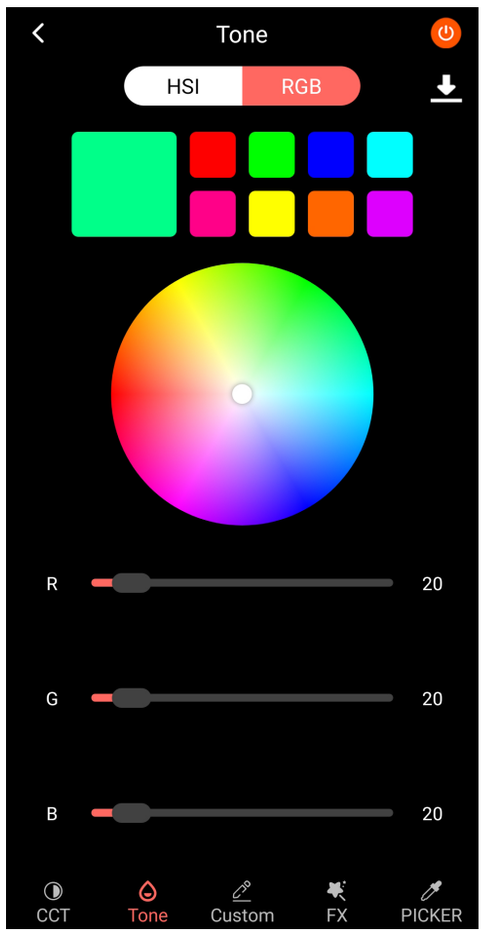

2.3 Custom Mode


Tap the custom icon at the bottom to enter the control interface. Tap the switch button to turn on/off the light. You can choose different color presets under the Custom and Gel Filter tabs and adjust the hue, saturation and brightness of each gel with the sliders.

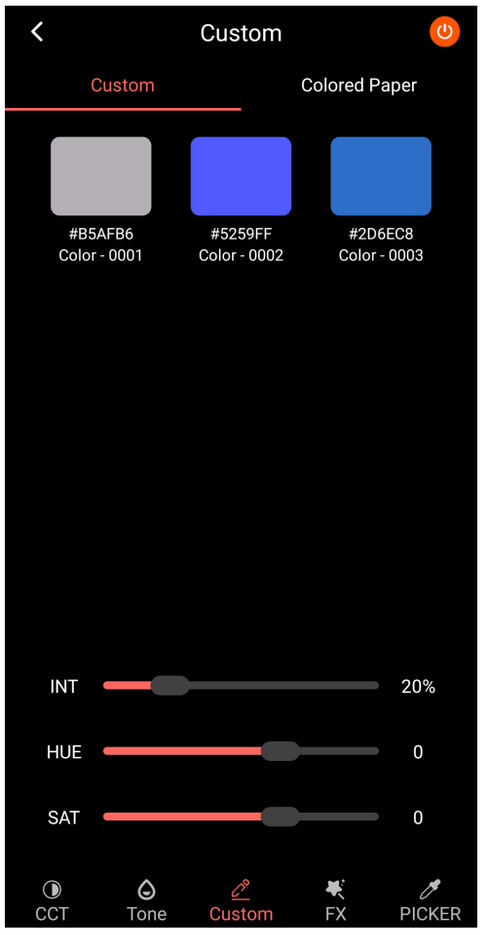

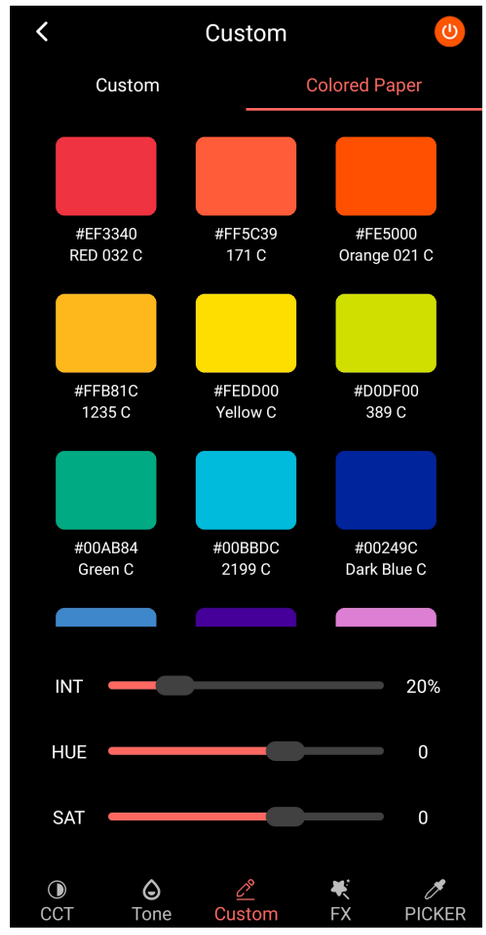

2.4 Effects Mode


Tap the FX icon at the bottom to enter the control interface. Tap the switch button to turn on/off the light. Use the sliders to adjust the brightness and speed of each effect. Effects: RGB Cycle, Flash, Disco, Lightning, Fault Light, TV, Candle, Fire, Firework, Police Car, Fire Truck, Ambulance, SOS.

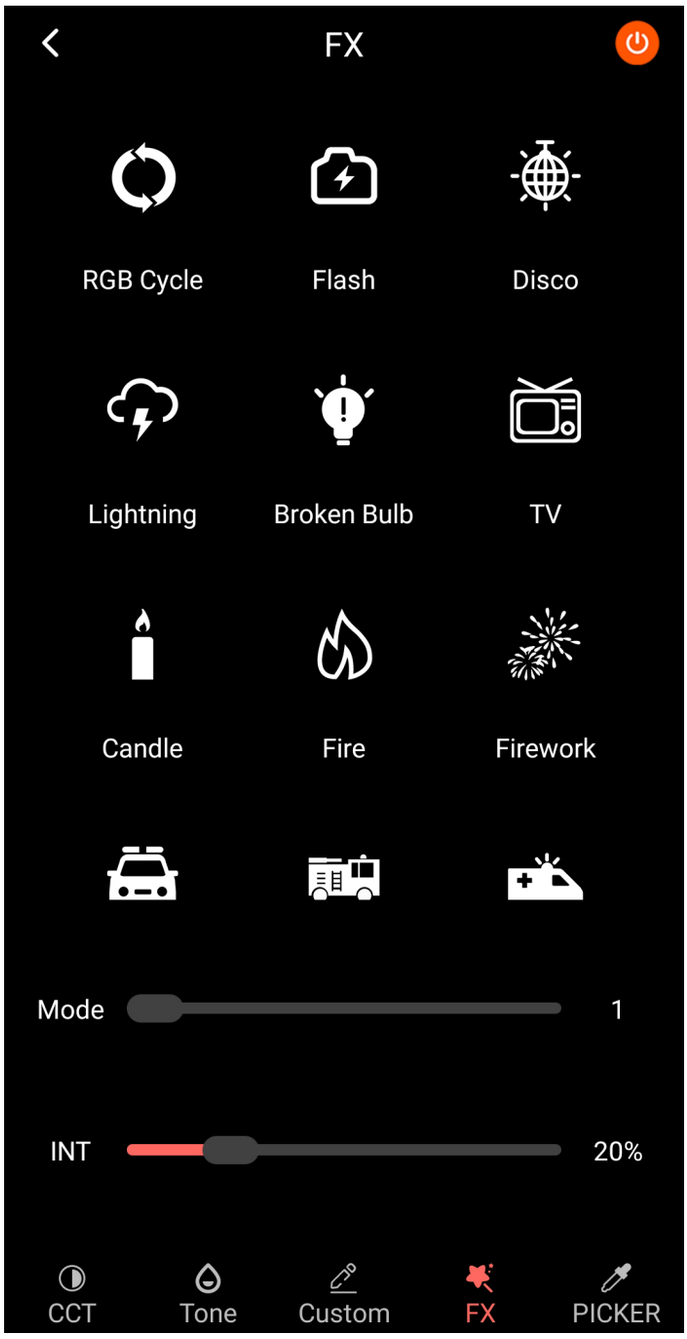

Notice: Control of FX special effects on the APP is very similar among LED lights of different models.

2.5 Color Picker


Tap the color picker icon at the bottom to enter the control interface. Tap the switch button to turn on/off the light. Tap the button in the middle to pick a color from your images and the light will replicate the color selected. Use the sliders to adjust the hue, saturation and brightness of the color. Tap the save button to save your settings.

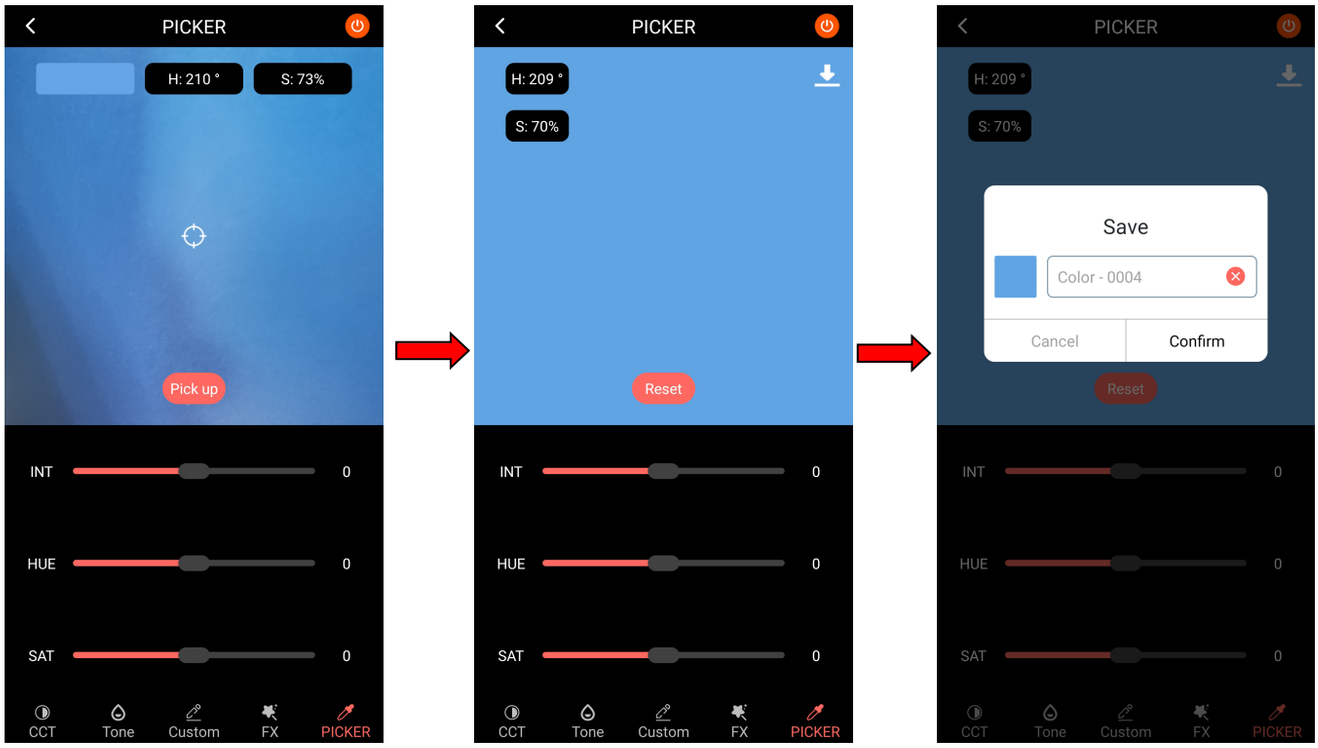

III、Group Control

Tap the "Group" tab on the top to enter the group control interface.

1. Tap the add icon on the top right to create a new group. Then add connectable lights to the group.
2. Tap confirm.
3. Go back to the group interface.
4. Tap a group to enter its control interface.

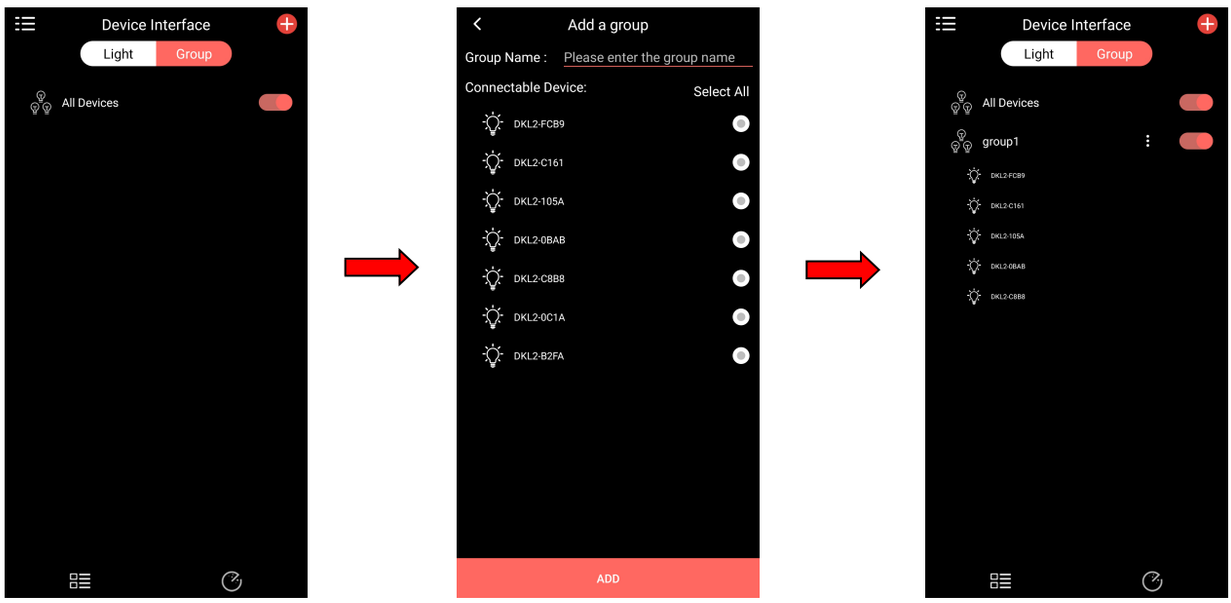


5. Group Control Rules


RGB and Bi-color LED light has the most functions, followed by the Bi-color LED light, and finally the single-color LED light.

When the above three kinds of lights are combined, then shows the control interface with the least functions.


IV、Firmware Upgrade

Tap the menu button of a light.

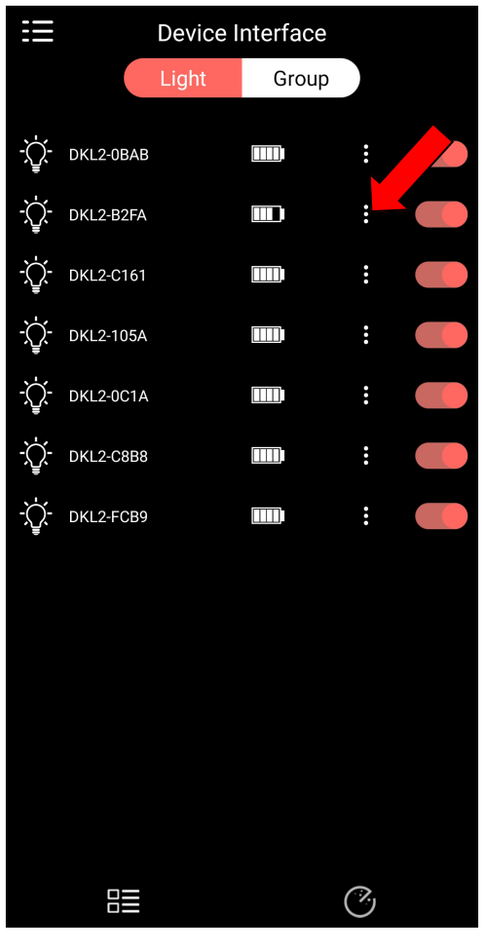

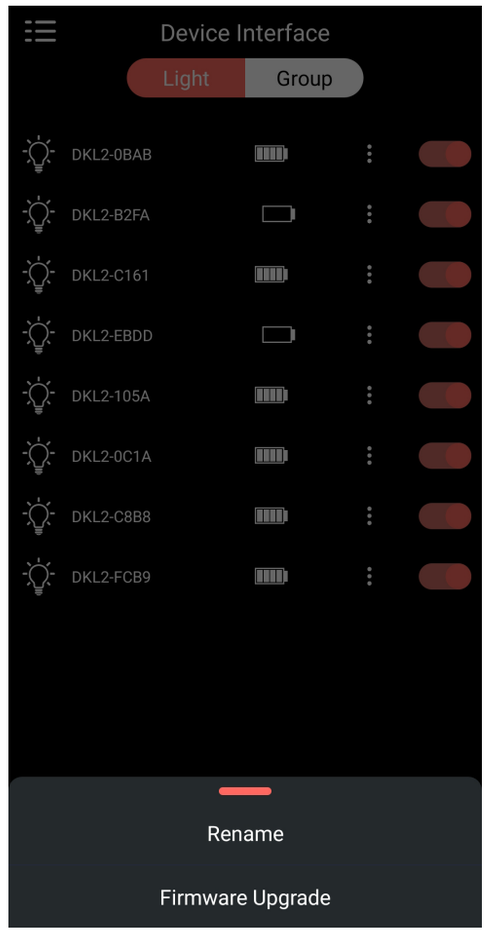

Click the firmware upgrade tab. Both Bluetooth firmware upgrade and main firmware upgrade are available. Click "check for updates" to see if there is a new version.

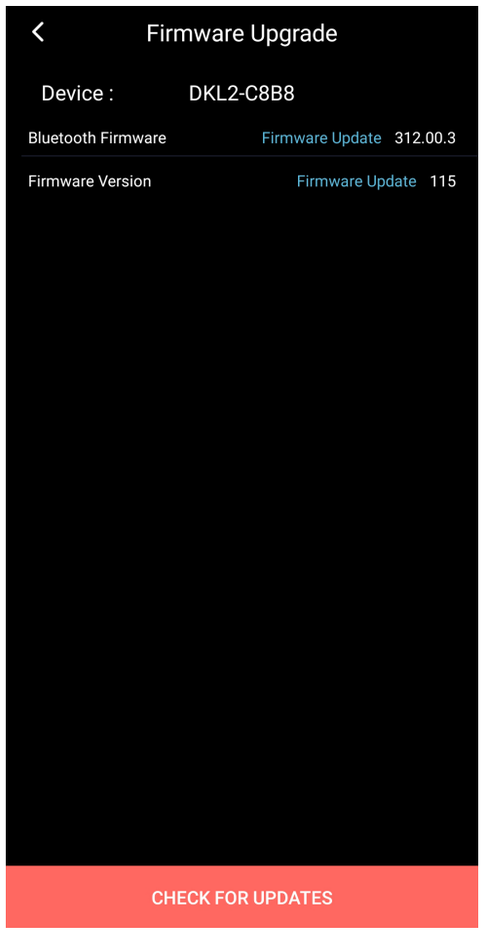

Notice:

1. There should be at least three bars left in the battery indicator.
2. Only one device is allowed to be upgraded at a time.
3. It is suggested to fully stretch the tube light when upgrading.

Ⅰ、APP Description

1.1 Overview

SIRUI Light APP is designed for SIRUI LED light series. This app allows you to adjust various parameters (color temperature, brightness, hue, saturation, etc.) as required to add more creativity to your scenes.

1.2 App Download and Installation

Please scan the QR code below or search for "SIRUI Light" in the App Store to download the App (iOS 9.0/Android 5.0 or above)







Scan to download

Notice:

Before using the App, please turn on Bluetooth, GPS location and allow the App to access storage and camera.




1.3 Notice

L2 is a Bi-color and RGB LED Light. The following operations take L2 LED light as an example. SIRUI has both single-color and Bi-color LED lights. The APP instruction of these lights is quite similar.

4.1 Bluetooth Firmware Upgrade

1. Click "firmware update" to the right of the Bluetooth firmware tab.
2. The upgrade prompt will pop up. Click "download now". (The light will flash red)
3. Once the upgrade is complete, the light will prompt "The upgrade is complete, please restart the device".
4. Restart the light and connect it to the APP again.

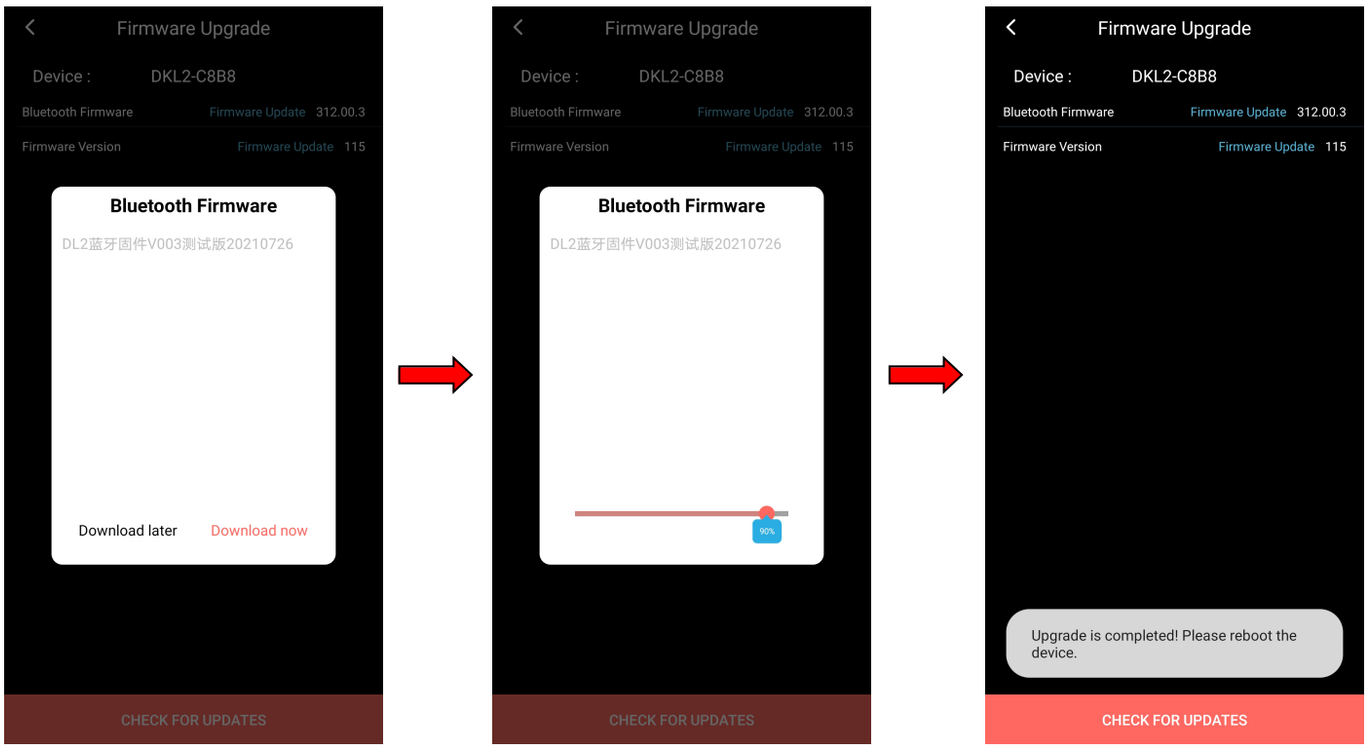

4.2 Main Firmware Upgrade

1. Click "firmware update" to the right of the main firmware tab.
2. The upgrade prompt will pop up. Click "download now". (The light will flash red)
3. Once the upgrade is complete, the light will prompt "The upgrade is complete, please restart the device".
4. Restart the light and connect it to the APP again.

